


SECTION P-P

N = Number of poles
 Dim L=(N+2)×5.0
 Dim B=(N-1)×5.0
 Dim C=(N-1)×5.0+5.4
 Dim D=(N-1)×5.0+5.4
 Dim E=(N-1)×5.0

Poles	Dim L	Dim B	Dim C	Dim D	Dim E
2×2-2×6p	±0.15	±0.15	+0.05 -0.05	+0.05 -0.05	±0.15
2×7-2×12p	±0.25	±0.25	+0.10 -0.05	+0.10 -0.05	±0.25
2×13-2×18p	±0.35	±0.35	+0.20 -0.05	+0.20 -0.05	±0.35
2×19-2×24p	±0.40	±0.40	+0.25 -0.10	+0.25 -0.10	±0.40

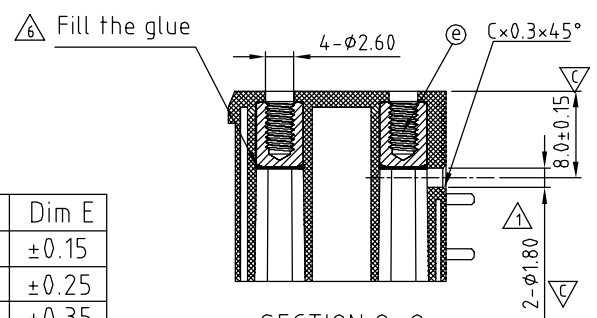

SECTION Q-Q

SIGN	DATE	DESCRIPTION	APPROVER
△	210.05.29	The design is changed	Chen Bo
△	04/16`12	Operating temperature is changed from -40°C to +130°C to -45°C to +120°C	Chen Bo
△	04/16`12	The Material is changed	Chen Bo
△	04/16`12	Add is cULus	Chen Bo
△	04/16`12	The Dimension D & E are added	Chen Bo
△	04/16`12	Flange nut is changed	Chen Bo
△	04/16`12	The dimension is changed from φ2.0 to φ2.40	Chen Bo

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

- Material:
- Item a Terminal(housing): High temp. polyamide (UL94V-0)
 - Item b Terminal(cover): High temp. polyamide (UL94V-0)
 - Item c Male contact pin of short: Copper Tin plated
 - Item d Male contact pin of long: Copper Tin plated
 - Item e With flange nut: Brass M2.5
- Electrical: cULus
- Voltage rating: 300V
 - Current rating: 12A
 - Withstanding Voltage: 1.6KV
 - Operating temperature: -45°C to +120°C
 - Soldering temperature: 280°C/10 Sec
 - Safety Approval: cULus
 - Critical dimension: ∇

KE xx 7 2 x 1 xxxx G

No. OF POLES
 04: 2×2 POLES
 06: 2×3 POLES
 :
 48: 2×24 POLES

COLOR
 0: BLACK

RoHS compliant (lead<4%)
 In copper Alloy

0000: "@ Logo (Standard)
 000A: "ANYTEK" Mark

Any special item by customer request.
 please contact sales department.

ANYTEK		CUSTOMER COPY		ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD	
				TITLE KE 5.0mm With Flange Series 2×2P-2×24P (90°-Rihgt angle) THR type	
PART NO.	KExx72x1xxxxG	DWG NO.	8KE0111		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance
		Chen Bo 04/16`12	Chen Bo 04/16`12		X. ±0.50 X.X ±0.30 X.XX ±0.10 X° ±1°
				SHEET: 01/01	UNIT: mm SCALE: NONE REV.: D