


SIGN	DATE	DESCRIPTION	APPROVER
△			

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

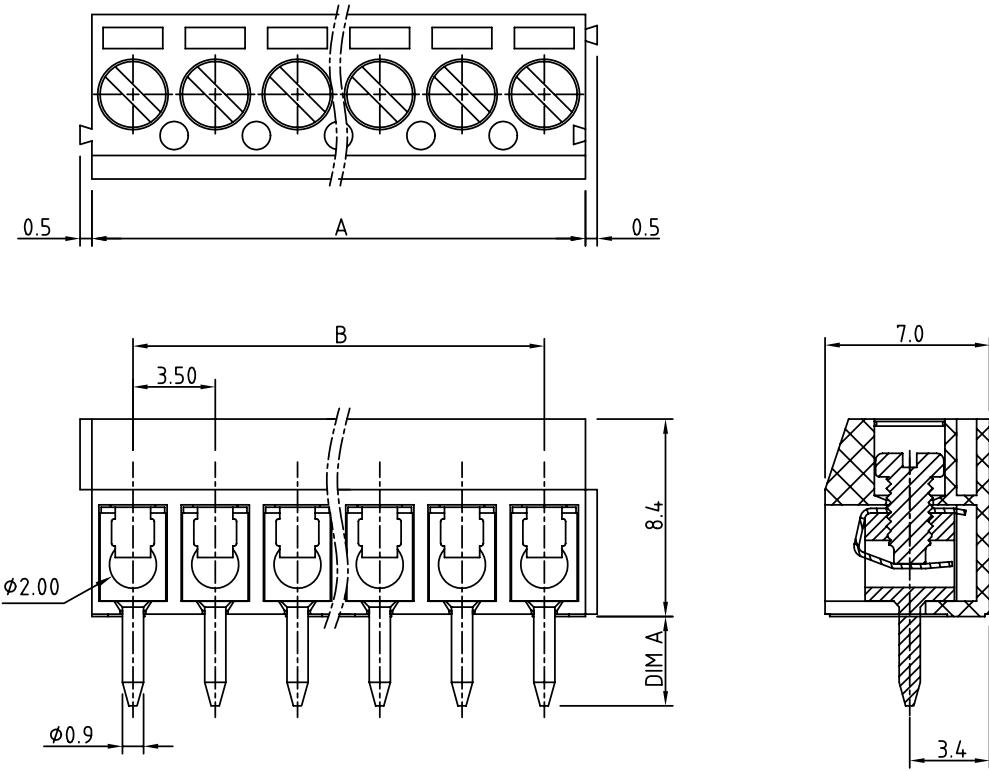

- Material:
- Terminal body
 - (metal housing): Brass(CuZn)
 - Terminal screw: Steel Plated Zinc
"-" slot type.
 - Wire guard: Stainless steel
 - Surface of solder tail: Tin plated
 - Insulator(housing): Thermoplastic (UL94V-0)

- Electrical: UL
- Voltage rating: 125V
 - Current rating: 10A
 - Wire range:
 - Solid wire(AWG): 16-26
 - Stranded wire(AWG): 16-26
 - Torque: 1.7Lb-In
 - Screw: M2
 - Wire strip length: 5-6mm
 - Withstanding Voltage: 1.25 KV
 - Operating temperature: -40°C to +115°C
 - Soldering temperature: 250°C±10°C/5 Sec
 - Safety Approval:

TE xx 0 1 x x xxxx G

- No. OF POLES ————
- 04: 4 POLES
:
24: 24POLES
- Color ————
- 0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange(RAL2011/P)
4 Yellow(RAL1018/A)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL7035/D)
- DIM A ————
- 3: 4.4mm
4: 3.8mm
5: 3.5mm
- G: Pb=40000ppm
0000: "@ " Logo (Standard)
000A: "ANYTEK" Mark
Any special item by customer request. please contact sales department.

P.C.B. LAYOUT

POLE			4	5	6	7	8	9	10	11	12	
A			14.00	17.50	21.00	24.50	28.00	31.50	35.00	38.50	42.00	
B			10.50	14.00	17.50	21.00	24.50	28.00	31.50	35.00	38.50	
Tol.	±0.10			±0.15								
POLE	13	14	15	16	17	18	19	20	21	22	23	24
A	45.50	49.00	52.50	56.00	59.50	63.00	66.50	70.00	73.50	77.00	80.50	84.00
B	42.00	45.50	49.00	52.50	56.00	59.50	63.00	66.50	70.00	73.50	77.00	80.50
Tol.	±0.20			±0.30								

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		TE 3.5mm Solid block series "-" Screw										
PART NO.	TExx01xxxxxxG						DWG NO.	8TE0103				
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.					Tolerance			
		Runner 2010.03.26	Runner 2010.03.26						X.	±0.50		
						UNIT: mm			X.X	±0.30		
						SCALE: NONE			X.XX	±0.10		
				SHEET: 01/01		REV.: C			X°	±1°		