
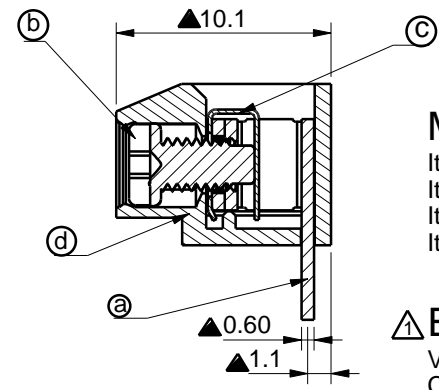
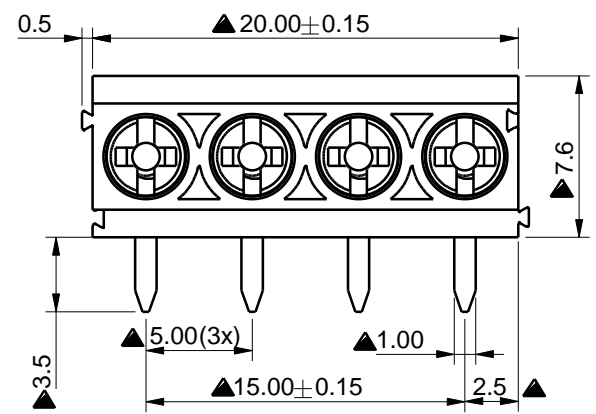


Rev.	SIGN	DATE	DESCRIPTION	APPROVER
B	-	2017.04.06	The first release	Johnson
C	⚠	2017.06.02	Add CULus	Johnson


THIS IS CREO DRAWING, DO NOT REVISE MANUALLY!!!



Material

- Item (a) Terminal body: Brass stamping, Matte Tin plated
- Item (b) Terminal screw: Steel Zinc plating "+/-" slot type
- Item (c) Wire guard: Stainless steel
- Item (d) Terminal housing: Thermoplastic (UL94V-0) Blue

- ⚠ Electrical**
- Voltage rating: 300VAC
 - Current rating: 8A
 - Wire range:
 - Solid wire(AWG): 14-26
 - Stranded wire(AWG): 14-26
 - Torque: 3.5Lb-In
 - Screw: M2.5
 - Wire strip length: 5-6mm
 - Withstanding Voltage: 1.6KV
 - Operating temperature: -40°C to +115°C
 - Soldering temperature: 260°C/5 Sec
 - Safety Approval: ⚠
 - Critical dimension: ▲

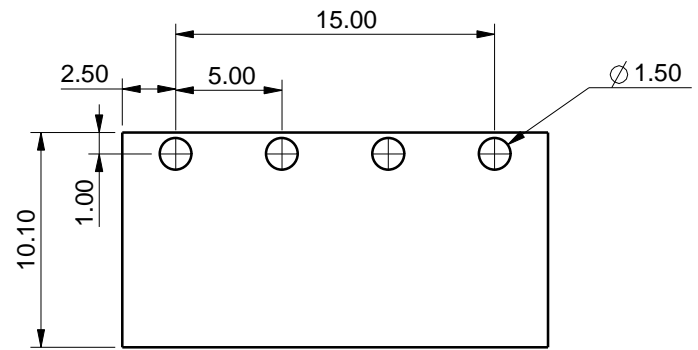

PCB LAYOUT

Amphenol ANYTEK				CUSTOMER COPY		
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD						
TITLE:	T3 5.0 SERIES 90° SOLID BLOCK 4P					
PART NO.	T304046500B0G	DWG NO.	8T30035			
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO	Tolerance	
		Johnson	Johnson		UNIT: mm	X. ±0.50
		2017.06.02	2017.06.02		SCALE 3:1	X.X ±0.30
						X.XX ±0.10
						X° ±1°
				SHEET: 1 / 1	REV.: C	