


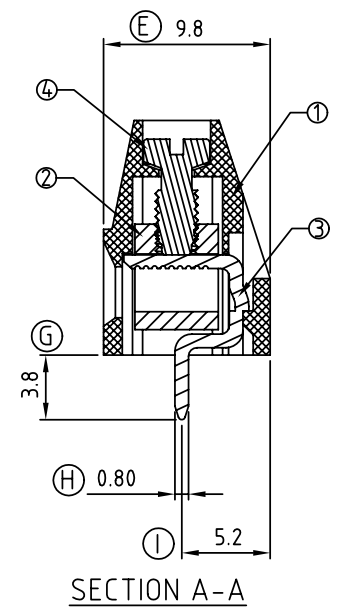
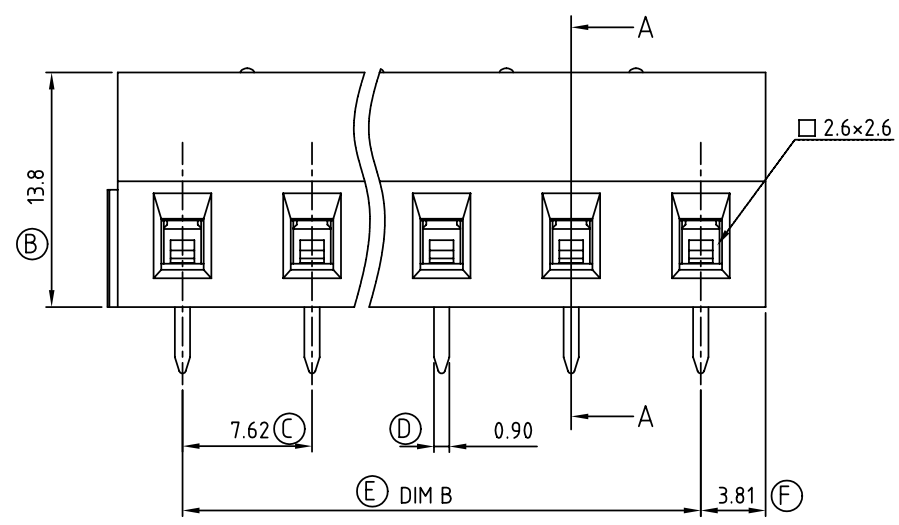
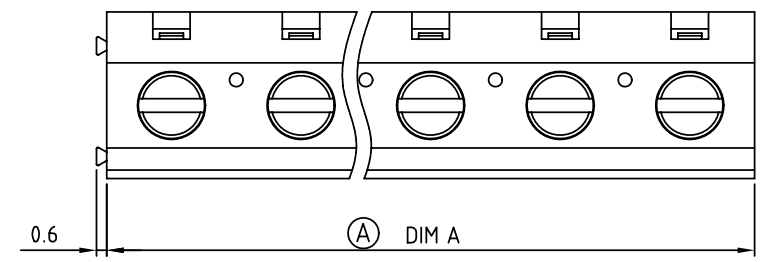
SIGN	DATE	DESCRIPTION	APPROVER
△			
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

- Material:
- Item 1 Terminal housing: Thermoplastic (UL 94V-0)
 - Item 2 Clamp: Brass ,Ni plated
 - Item 3 Wire guard solder pin : Brass ,Tin plated
 - Item 4 Terminal screw: Steel, Zinc plating"- "slot type

- Electrical cULus
- Voltage rating: 300VAC
 - Current rating: 10A
 - Wire range:
 - Solid wire(AWG): 12-22
 - Stranded wire(AWG): 12-22
 - Torque(Lb-In): 3.5
 - Screw: M2.5
 - Wire strip length: 6-7mm
 - Withstanding Voltage: 1.6KV
 - Operating temperature: -40°C to +115°C
 - Soldering temperature: 250°C±10°C/5 Sec
 - Safety Approval: 

N = Number of poles

DIM A	N×7.62
DIM B	(N-1)×7.62
2p-6p	±0.15
7p-12p	±0.25
13p-16p	±0.35




N=Number of contacts

TI xx 4 1 x A xxxxx G


No. OF POLES ————
 02: 2 POLES
 :
 :
 16: 16 POLES

COLOR ————
 0: BLACK
 5: GREEN (RAL 6018/T)
 6: BLUE
 8: GREY (RAL 7035/D)

G: Pb<40000ppm
 0000: "@ " Logo (Standard)
 000A: "ANYTEK" Mark
 Any special item by customer request.
 please contact sales department.

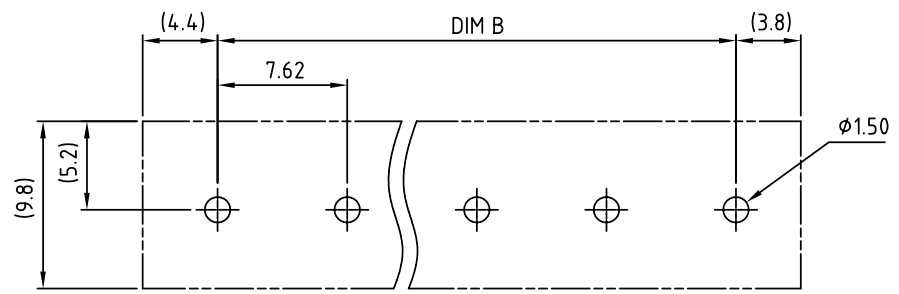

P.C.B LAYOUT

ANYTEK				CUSTOMER COPY			
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD							
TITLE		TI 7.62 SERIES 2P-16P		DWG NO.		8TI04.01	
PART NO.		TIxx41xAxxxxG		CUST NO.			
APPROVED	CHECKED	DESIGNED	DRAWN				
		Aaron 2009.06.26	Aaron 2009.06.26				
				UNIT: mm		Tolerance	
				SCALE: NONE		X. ±0.50	
				SHEET: 01/01		X.X ±0.30	
				REV.: B		X.XX ±0.10	
						X° ±1°	