



SIGN	DATE	DESCRIPTION	APPROVER
△			
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

single row strip socket pitch 2.54mm

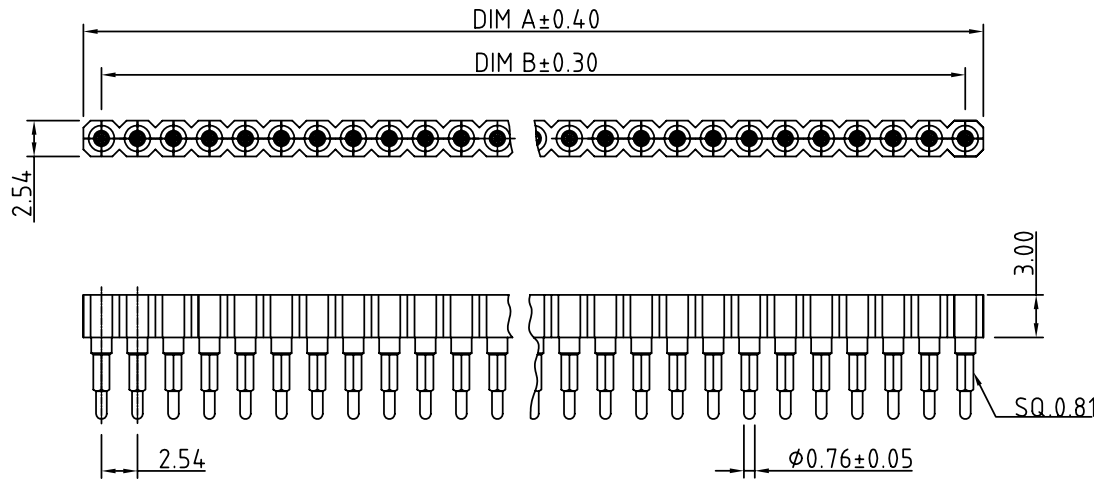

P.C.B LAYOUT

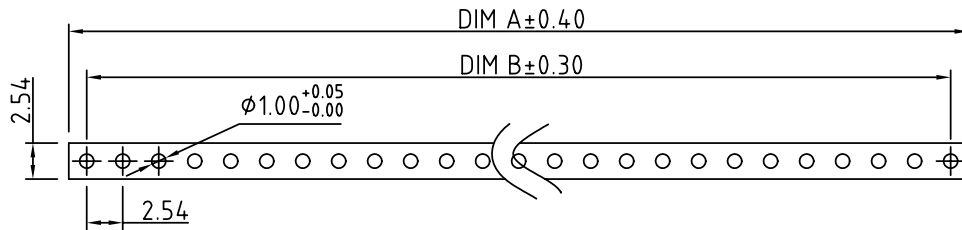

Contact	DIM A	DIM B	Contact	DIM A	DIM B	Contact	DIM A	DIM B
01	2.54	—	15	38.10	35.56	29	73.66	71.12
02	5.08	2.54	16	40.64	38.10	30	76.20	73.66
03	7.62	5.08	17	43.18	40.64	31	78.74	76.20
04	10.16	7.62	18	45.72	43.18	32	81.28	78.74
05	12.70	10.16	19	48.26	45.72	33	83.82	81.28
06	15.24	12.70	20	50.80	48.26	34	86.36	83.82
07	17.78	15.24	21	53.34	50.80	35	88.90	86.36
08	20.32	17.78	22	55.88	53.34	36	91.44	88.90
09	22.86	20.32	23	58.42	55.88	37	93.98	91.44
10	25.40	22.86	24	60.96	58.42	38	96.52	93.98
11	27.94	25.40	25	63.50	60.96	39	99.06	96.52
12	30.48	27.94	26	66.04	63.50	40	101.16	99.06
13	33.02	30.48	27	68.58	66.04			
14	35.56	33.02	28	71.12	68.58			

Technical Data:

- Pin (outer sleeve) : Brass,machined, CuZn38Pb2
- Clip(contact 4 finger) : Beryllium copper,heat treated or PHBZ
- Plating(outer sleeve) : Tin plated : 2um/80u"nickel,5um/200u" Tin
Gold plated: 2um/80u"nickel,full gold
- Plating clip(contact): 2um/80 u"nickel,gold or tin plating
- Insulator body(black) : PPS UL94V-0
- Electrical
- Current rating : 3 Amps/contact max.
- Contact resistance : 4m Ω contact
- Insulation resistance : 10000M Ω at 500VAC
- Rated voltage : 100 VRMS /150VDC
- Mechanical
- Operating temperature: Gold plated:-55°C to +125°C (continuous) Tin plated:-40°C to +105°C
- Average insertion force : <250g
- with steel pin of φ0.43mm/0.017"
- Average withdrawal :>50g
- force with steel pin of φ0.43mm/0.017"
- Mechanical life : min.200
- Compliant pin for solderless mount into P.C.B
Plated-thru holes:φ1.0mm+0.05/-0.00mm
- Soldering temperature : +260°C,10s max.

SC-XX 0 0 X 1 0000G
 No.of contacts :02~80
 pin plated: Code Clip plated Pin plated

0	Gold Flash	Tin 200u"
1	Gold 10u"	Tin 200u"
2	Gold 30u"	Tin 200u"
3	Tin 200u"	Tin 200u"
4	Gold flash	Gold flash
5	Gold 10u"	Gold flash
6	Gold 30u"	Gold flash

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		SC-Single row IC Sockets Pin 8.76mmL Series(ROHS)			
PART NO.	SCXX00X10000G	DWG NO.	8SC0101		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance
		Seamus 2005.11.22	Aaron 2005.11.20		X. ±0.50 X.X ±0.30 X.XX ±0.10 X° ±1°
SHEET: 01/01				UNIT: mm	
				SCALE: NONE	
				REV.: B	