SIGN	DATE	DESCRIPTION	APPROVER
⚠1	2011.05.04	Added cULus standard	Chen Bo
		THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!	

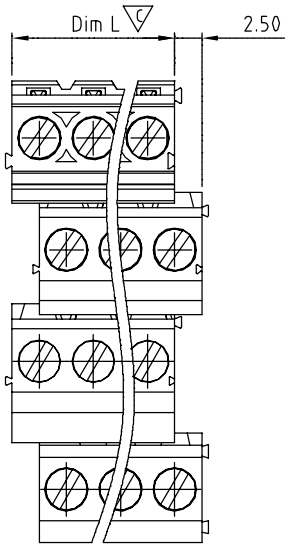

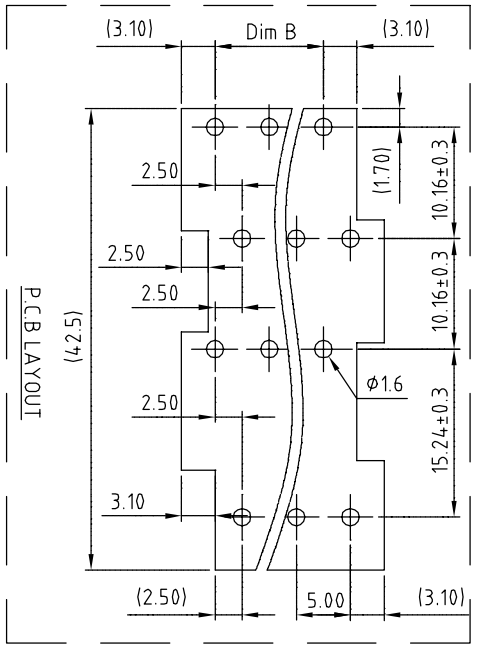

N=Number of contacts

Dim L	N/4x5.0
Dim B	(N/4-1)x5.0

Poles	Dim B Tol	Dim L Tol
8pole~24pole	±0.15	±0.15
28pole~48pole	±0.25	±0.25
52pole~72pole	±0.35	±0.35
76pole~96pole	±0.40	±0.40

Material:

- Item ① Terminal screw: Steel Zinc plating "-" slot type
- Item ② Clamp : Brass , Ni plating
- Item ③ Wire guard solder pin : Brass,Tin plated
- Item ④ Terminal housing : PA 66 (UL94V-0)

Electrical cULus

- Voltage rating: 300VAC
- Current rating: 10A
- Wire range:
- Solid wire(AWG): 12-24
- Stranded wire(AWG): 12-24
- Torque(Lb-In): 3.5
- Screw: M2.5
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec
- ⚠1 Safey Approval:

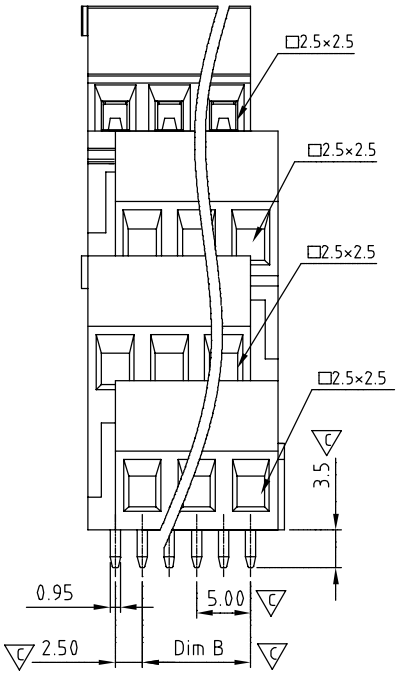

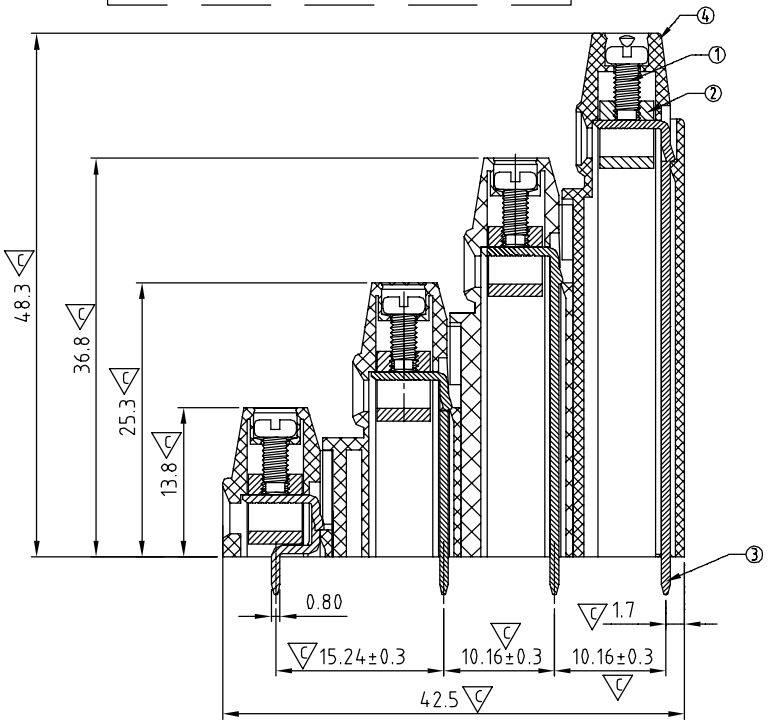

PART NO.

YT xx 01 x 0 xxxx G

- xx: No. of poles end stackable design
  - 08 4X2P CONTACTS
  - 12 4X3P CONTACTS
  - — —— —
  - 96 4X24P CONTACTS
- x: 0 Black (RAL9005); 2 Red (RAL3001/D); 3 Orange(RAL2011/P); 4 Yellow(RAL1018/A); 5 Green(RAL6018/T); 6 Blue (RAL5015/A); 8 Grey(RAL7035/D)
- xxxx: 0000 Standard @ Logo; 000A Standard ANY Logo; Any special item by customer request, please contact sales department.
- G: RoHS Pb<40,000ppm

● Critical dimension: Ⓒ

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	YT-5.0mm Series 4×2P-4×24P				
PART NO.	YTxx01x0xxxxG			DWG NO.	8YT0001
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
			Chen Bo 2011.05.04	UNIT: mm	Tolerance X. ±0.50
				SCALE: NONE	X.X ±0.30
				SHEET: 01/01	REV.: C

X.XX ±0.10
X° ±1°