



SIGN	DATE	DESCRIPTION	APPROVER
△	01/30 '07	Part No.changed	Tason
△	11/24 '11	Changed the color is from 7035/D to 7004/P	Runner




THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:

- Clamp : Brass , Ni plated
- Terminal screw: Steel Zinc plating "-" slot type.
- Wire guard solder pin : Brass , Tin plated
- Terminal housing : Thermoplastic (UL94V-0)

Electrical: cULus

- Voltage rating: 600V
- Current rating: 65A
- Wire range:
- Solid wire(AWG): 6-22
- Stranded wire(AWG): 6-22
- Torque: 8.7 Lb-In.
- Screw: M4
- Wire strip length: 6-7mm
- Withstanding Voltage: 2.2KV
- Operating temperature: -40°C to +115°C
- Safety Approval: 
- Critical dimension: 

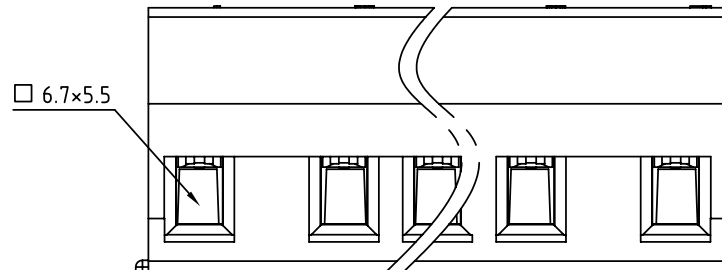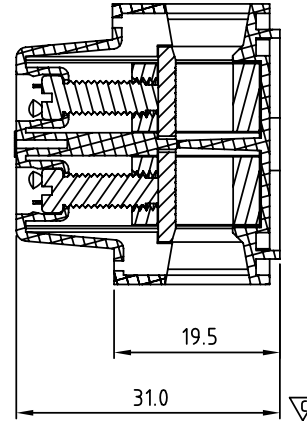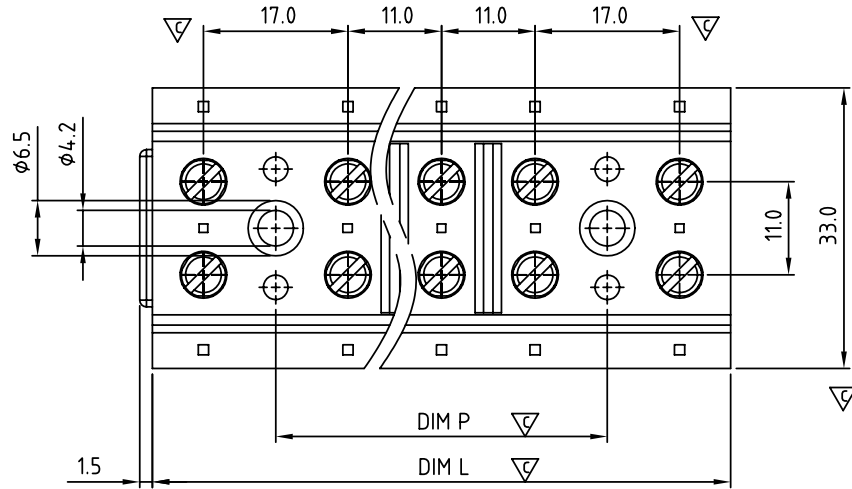

Ploes	DIM L	DIM P	Tol.
2ploes	29.0		±0.30
3ploes	46.0	17.0	
4ploes	57.0	28.0	
5ploes	68.0	39.0	

V4 xx 0 1 x 0 xxxx G

- 02 2 CONTACTS
- 03 3 CONTACTS
- 04 4 CONTACTS
- 05 5 CONTACTS

- COLOR
- 0 BLACK
  - 5 Green (RAL6018/T)
  - 6 Blue
  - 8 Grey (RAL7004/P)


RoHS compliant (lead<4%)  
In copper Alloy

0000: Standard (Steel screw plating Cr<sup>3+</sup>)  
Any special item by customer request.  
please contact sales department.

**ANYTEK**

**CUSTOMER COPY**

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	V4 Series (2P-5P)				DWG NO.	8V40001	
PART NO.	V4xx01x0xxxxG			CUST NO.			
APPROVED	CHECKED	DESIGNED	DRAWN				
		Runner 2011.11.23	Tony 2006.02.07				
				UNIT: mm	X.	±0.50	
				SCALE: NONE	X.X	±0.30	
				REV.: E	X.XX	±0.10	
				SHEET: 01/01	X°	±1°	