





SIGN	DATE	DESCRIPTION	APPROVER
△			
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

Materials


- Item a Terminal body:Thermoplastic (UL 94V-0)
- Item b Terminal screw: Steel Zinc plating "-" slot type
- Item c Clamp: Zinc alloy . Ni plated
- Item d Long wire guard solder pin: Brass .Tin plated
- Item e Center wire guard solder pin: Brass .Tin plated
- Item f Short Wire guard solder pin: Brass .Tin plated

Electrical cULus

- Voltage rating: 600VAC
- Current rating: 20A
- Wire range:
- Solid wire(AWG): 12-30
- Stranded wire(AWG): 12-30
- Torque(Lb-In): 4.3
- Screw: M3
- Wire strip length: 7-8mm
- Withstanding Voltage: 2.2KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±5°C/5 Sec
- Safety Approval:

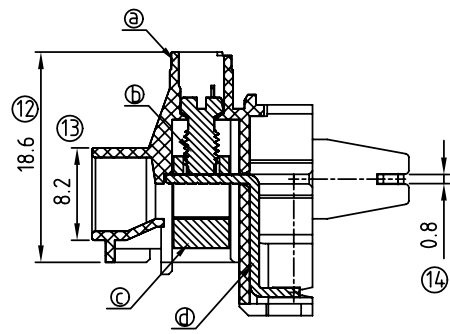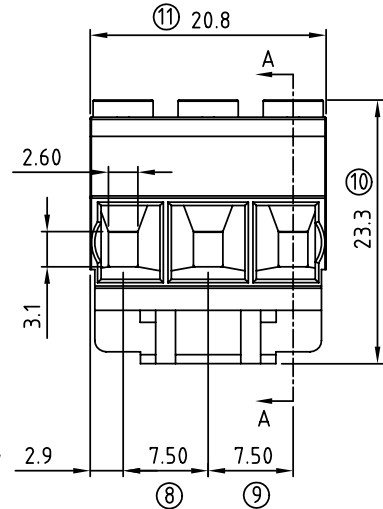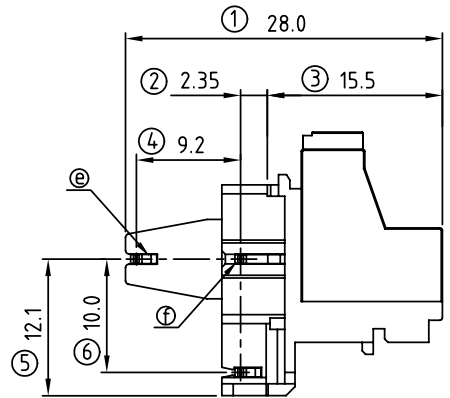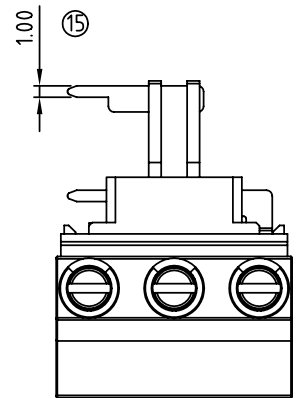

SECTION A-A

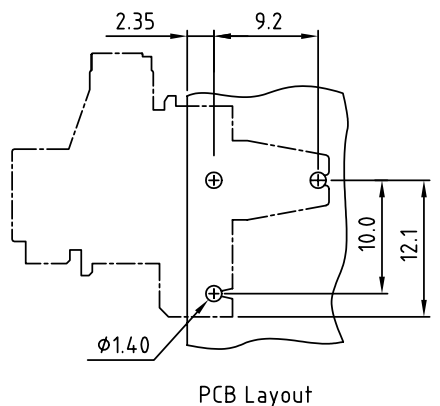

PCB Layout

K7 03 0 3 x 1 xxxx G

- G: Pb<40000ppm
- COLOR
- 0000: "@" Logo (Standard)
- 000A: "ANYTEK" Mark
- Any special item by customer request. please contact sales department.
- 0 Black (RAL9005)
- 2 Red (RAL3001/D)
- 3 Orange(RAL2011/P)
- 4 Yellow(RAL1018/A)
- 5 Green(RAL6018/T)
- 6 Blue (RAL5015/A)
- 8 Grey(RAL7035/D)

**ANYTEK**

**CUSTOMER COPY**

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		K7 7.5 SERIES 3P (Left)			
PART NO.		K70303x1xxxxG		DWG NO. 8K70002	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Runner	Runner		
		2010.11.09	2010.11.09		
				Tolerance	
				UNIT: mm	
				SCALE: NONE	
				X. ±0.5	
				X.X ±0.3	
				X.XX ±0.1	
				X° ±1°	
				SHEET: 01/01	
				REV.: A	