


SIGN	DATE	DESCRIPTION	APPROVER
△			

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

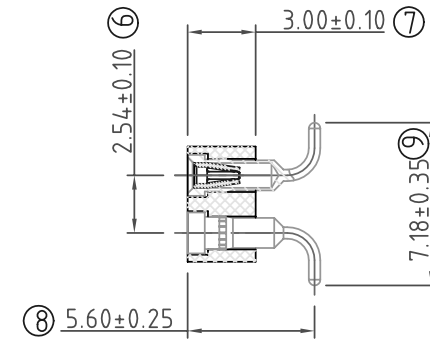

SECTION A-A

- Material:
 - Pin (outer sleeve) : Brass,machined, CuZn38Pb2
 - Clip(contact 4 finger) : Beryllium copper ,heat treated or PHBZ
 - Plating(outer sleeve) : Tin plated : 2um/80u"nickel,5um/200u" Tin
Gold plated: 2um/80u"nickel,full gold
 - Plating clip(contact): 2um/80 u"nickel,gold or tin plating
 - Insulator body(black) : Glass filled Hi-temperature thermoplastic UL94V-0
- Electrical
 - Current rating : 3 Amps/contact max.
 - Contact resistance : < 4mΩ/contact
 - Insulation resistance : >10000MΩat 500VAC
 - Rated voltage : 100 VRMS /150VDC
- Mechanical
 - Operating temperature : Gold plated:-55°C to +125°C
(Continuous) -67°F to +105°F
Tin plated:-40°Cto +105°C
 - Average insertion force with steel pin of: 0.43mm/0.017" < 250g
 - Average withdrawal force with steel pin of 0.43mm/0.017" >50g
 - Mechanical life : min.200
- Environmental data
 - Solderability (IEC 60068-2-20. Ta) :235°C, 2s
 - Resistance to soldering heat (IEC 60068-2-20. Tb) :
-Through hole mount components :260°C, 10s

Ordering information

SE - XX 1 0 X 20100G

- pin plated- 0: Gold flash Tin 200u"
- 1: Gold 10u" Tin 200u"
- 2: Gold 30u" Tin 200u"
- 3: Tin 200u" Tin 200u"
- 4: Gold flash Gold flash
- 5: Gold 10u" Gold flash
- 6: Gold 30u" Gold flash

No.of contacts : 02-80

ANYTEK				CUSTOMER COPY			
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD							
TITLE	SE 雙排IC SocKet (7.43mmL 折彎PIN)						
PART NO.	SEX10X20100G			DWG NO.	8SE2001		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance		
		Seamus 2007.01.22	Aaron 2007.01.20		X. ±0.50 X.X ±0.30 X.XX ±0.10 X° ±1°		
				UNIT: mm			
				SCALE: NONE			
				SHEET: 01/01	REV.: B		