
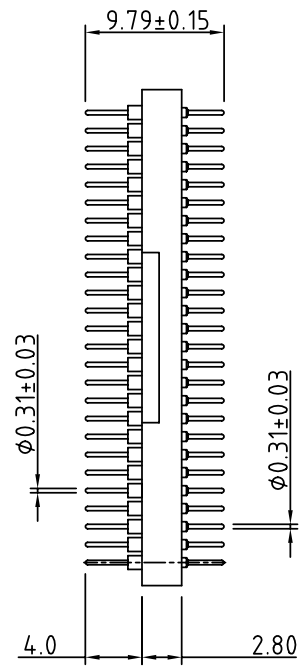


SIGN	DATE	DESCRIPTION	APPROVER
△			
<i>THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!</i>			

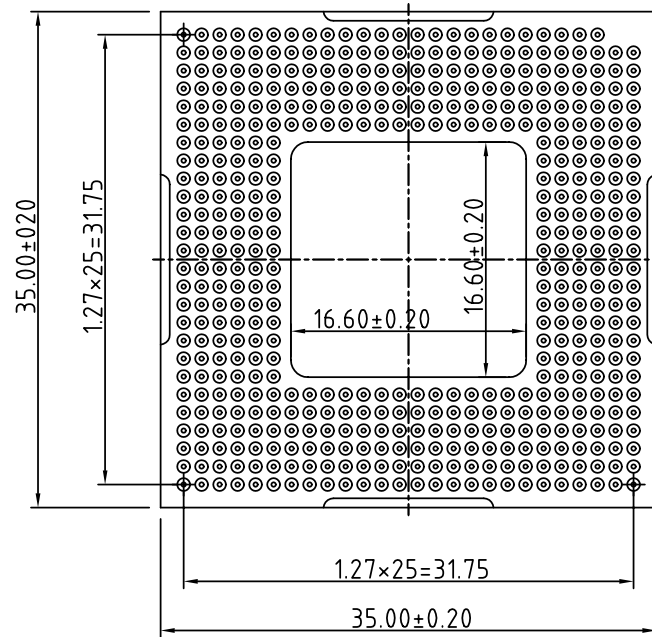

- Technical Data:
- Material
- Pin : Brass, Screw Machined
 - Plating (Sleeve) : Tin plated over Brass & Nickel, or 3u" Gold Plated over Brass
 - Special Plating : see table on "Pin Plated Code"
 - Insulator body : FR-4
- Electrical
- Current rating : 3Amps/contact max.
 - Contact resistance: $\leq 4m\Omega$ /contact
 - Insulation resistance: $\geq 1KM\Omega$ at V=100V
 - Operating Voltage: 60 Vac/DC
- Mechanical
- Operating temperature(continuous) : Gold plated : -55°C to +125°C
Tin plated : -40°C to +105°C
 - Soldering temperature: +260°C, 10s max.
- Ordering information:

SQ0971 X 00000G

Code	Pin plated
0	Tin 200u"
1	Gold 3u"
2	Gold 10u"
3	Gold 30u"

ANYTEK				CUSTOMER COPY			
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD							
TITLE	SQ- 478P PPS Adapter Pin9.79mmL						
PART NO.	SQ0971x00000G			DWG NO.	8SQ0005-478		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance		
		Seamus 2005.11.07	Seamus 2005.11.07		UNIT: mm	X.	±0.50
					SCALE: NONE	X.X	±0.30
SHEET: 01/01					REV.: B	X.XX	±0.10
						X*	±1°