

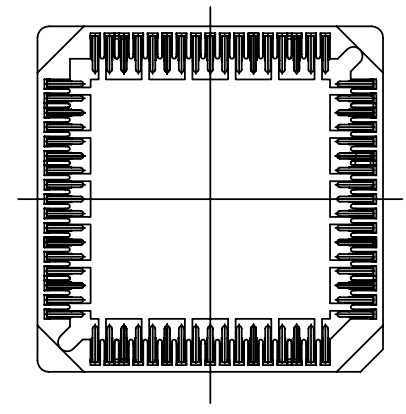


SIGN	DATE	DESCRIPTION	APPROVER
△			
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

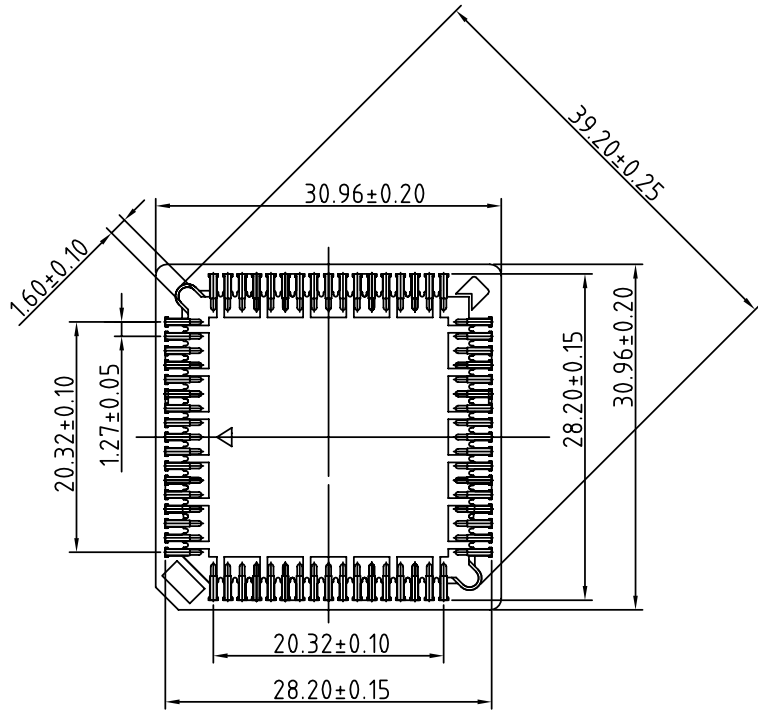

BOTTEM VIEW

- Notes:
- Materials and Finish
  - Housing: polyphenylene sulfide UL-94V-0
  - Contacts: phosphor bronze.
  - Plating: 150u" Min Tin/Lead 90/10. 50u" Min Nickel overall.
  - Specifications: Insulation resistance:1000 megohms Max. Dielectric withstand strength: 500V (r.m.s) AC for 1 Minute. Contact resistance: 30Ωm Max.
  - Temperature:-55°C~+105°C

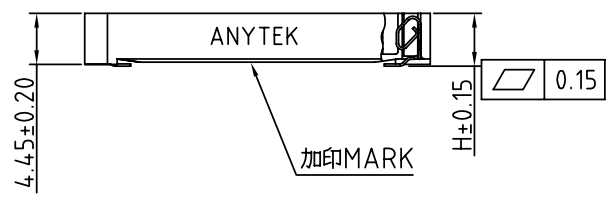

L B 6 8 0 1 X X CT00G

Packing method

Code	Definition
0	Tube
1	Tape Reel

Dim H Height

Code	DIM H
0	3.8mm
1	4.3mm
2	4.6mm

<b>ANYTEK</b>				<b>CUSTOMER COPY</b>				
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD								
TITLE		PLCC SMT TYPE LOW PROFILE 68PIN (印字)						
PART NO.		LB6801xxCT00G			DWG NO.		8LB0007B1-68	
APPROVED		CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance	
		黃新疆 2005.5.05	黃新疆 2005.5.05	毛軍 2005.5.05			X. ±0.50	
							UNIT: mm	X.X ±0.30
							SCALE: NONE	X.XX ±0.10
					SHEET: 01/01		X* ±1*	