


SIGN	DATE	DESCRIPTION	APPROVER
△			
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

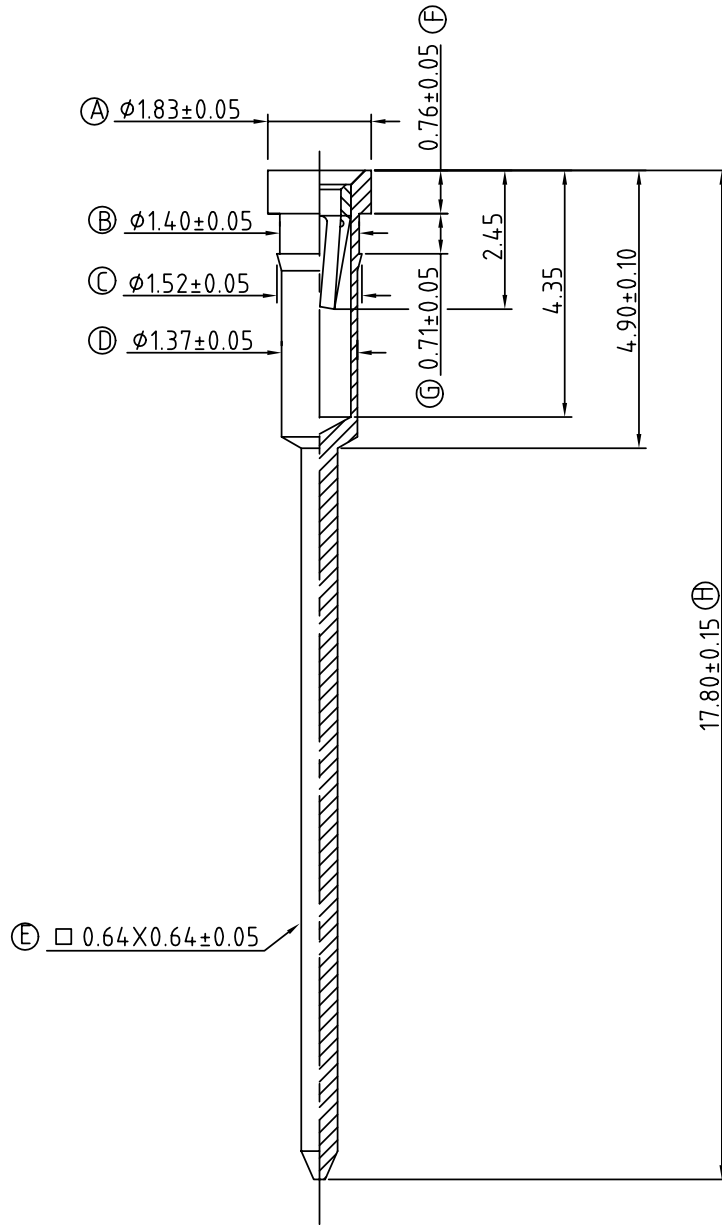

### Technical Data

#### Material

- Pin(outer sleeve):Brass
- Clip(contact 4 finger):Beryllium copper,heat treated
- Plating(outer sleeve):Tin plated:2um/80u"nickel,5um/200u"Tin
- Plating(contact):2um/80u"nickel,gold or Tin plating(See TABLE)

#### Electrical

- Current rating:3 Amps/contact max
- Contact resistance: $\leq 4m\Omega$ /contact

#### Mechanical

- Average insertion force with steel pin of  $\phi 0.43mm < 250gf$
- Average with-drawal force with steel pin of  $\phi 0.43mm > 50gf$

### Ordering information

OD-4 0 0 0 X 20000G

	pin plated:	Code	Clip plated	Pin plated
		0	Gold Flash	Tin 200u"
		1	Gold 10u"	Tin 200u"
		2	Gold 30u"	Tin 200u"
		3	Tin 200u"	Tin 200u"
		4	Gold flash	Gold flash
		5	Gold 10u"	Gold flash
		6	Gold 30u"	Gold flash

# ANYTEK

## CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		ODseries wire wrap L:17.80mm		
PART NO.	OD4000X20000G	DWG NO.	OD0001	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.
		Seamus 2005.09.08	Aaron 2005.09.07	
				Tolerance X. ±0.50 X.X ±0.30 X.XX ±0.10 X° ±1°
		SHEET: 01/01		UNIT: mm SCALE: NONE REV.: B