
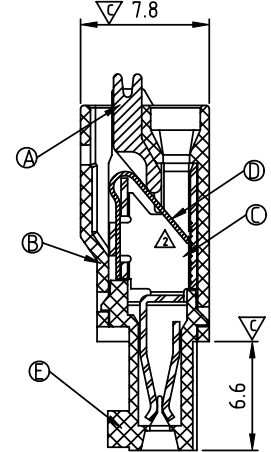
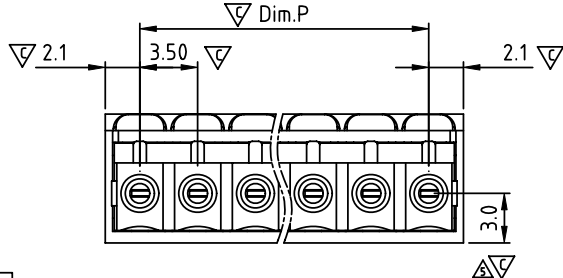


2P ~ 6P Ribs on both sides
7P ~ 24P No rib

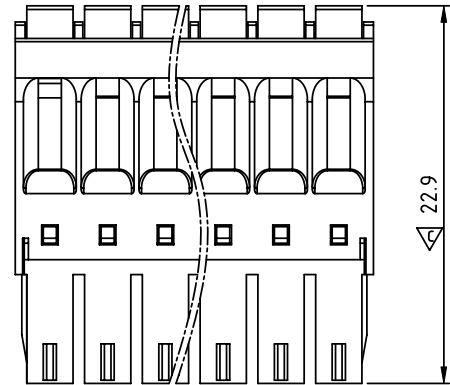

SIGN	DATE	DESCRIPTION	APPROVER
△	6/30'09	Withstanding Voltage changed from 1.6KV to 1.32KV.	Kind
△	9/26'09	The spring clamp changed.	Kind
△	11/25'09	The Grey code changed from RAL7004/P to RAL 7035/D.	Kind
△	07/30'10	2P ~ 6P add rid	Runner
△	8/05'13	update the drawing	Da cheng

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!

Material:

- Item A Terminal lever: Thermoplastic (UL94V-0) Orange(RAL 2011/P)
 - Item B Terminal top housing: Thermoplastic (UL94V-0)
 - Item C Female contact : PhBz Tin Plated.
 - Item D Spring clamp : Stainless steel
 - Item E Terminal down housing: Thermoplastic (UL94V-0)
- Electrical: cULus
- Voltage rating: 160 V
 - Current rating: 5.5 A
 - Wire range:
 - Solid wire(AWG): 16-24
 - Stranded wire(AWG): 16-24
 - Wire strip length: 9-10 mm
 - Withstanding Voltage: 1.32 KV
 - Operating temperature: -40°C to +115°C
 - APPROVAL:
 - Critical dimension:

KD xx 1 0 x 0 xxxx G

No. OF POLES
02: 2 POLES
:
24: 24 POLES

COLOR
0: BLACK
5: GREEN (RAL 6018/T)
6: BLUE
△ 8: GREY (RAL 7035/D)

RoHS compliant
(lead<4%)
In copper Alloy

0000: "@" Logo (Standard)
000A: "ANYTEK" Mark
Any special item by customer request.
please contact sales department.

△
DimL=(N-1)×3.5+4.2
DimP=(N-1)×3.5

N=Number of poles

POLES	Tol	Dim.	Dim.L/P
2p-6p			±0.15
7p-12p			±0.25
13p-18p			±0.30
19p-24p			±0.40

ANYTEK		CUSTOMER COPY			
		ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD			
TITLE	KD 3.5mm W/O Flange Series				
PART NO.	KDxx10x0xxxxG	DWG NO.	8KD0001		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance X. ±0.50 X.X ±0.30 X.XX ±0.10 X° ±1°
		Da cheng 2013.08.05	Da cheng 2013.08.05		
					UNIT: mm
					SCALE: NONE
				SHEET: 01/01	REV.: G