
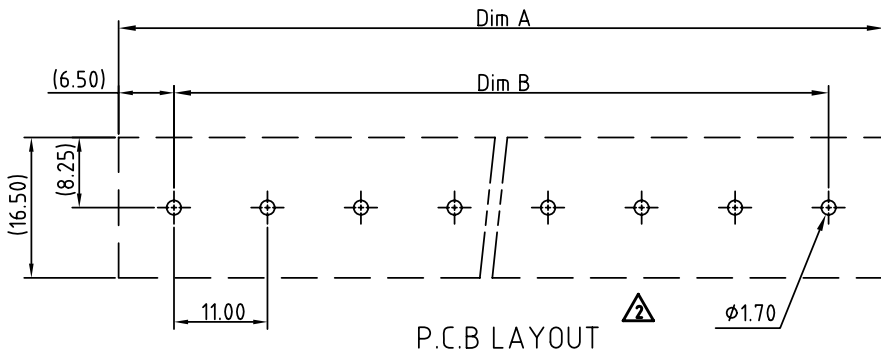


Section P-P

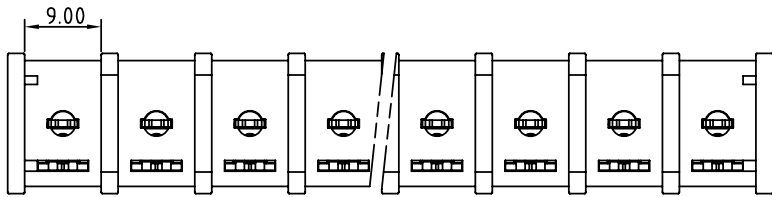

P.C.B LAYOUT

4
 N = Number of poles
 Dim A = $N \times 11.0 + 2.0$
 Dim B = $(N - 1) \times 11.0$

Pol.	Tol.	Dim A&B
2-4p		± 0.20
5-11p		± 0.30
17-18p		± 0.40

SIGN	DATE	DESCRIPTION	APPROVER
4	10/14'09	Terminal screw plated is changed from Ni plated to Zinc plated	Aaron
4	05/28'11	Add the P.C.B LAYOUT	Tason
4	05/28'11	Critical dimension is changed.	Tason
4	05/28'11	The tolerance table is changed.	Tason
4	01/04'12	The design is changed.	Chen Bo
4	01/04'12	The Dimension 6.5 are added	Chen Bo
4	12/11'12	Update the drawing	Jacky

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

MATERIALS ELECTRICAL
 RATED VOLTAGE & CURRENT: 300 V, 30 A
 WITHSTAND VOLTAGE: AC 2000 V/Min
 INSULATION RESISTANCE: 1000 M Ω OR MORE AT DC 500 V
 OPERATING TEMPERATURE RANG: -40 °C ~ +115 °C
 SCREW TORQUE VALUE: 15 Kgf.cm
 WIRE RANGE: 22 - 10AWG
 1) BODY: THERMOPLASTICS, UL94-V0 BLACK
 2) TERMINAL: BRASS, 0.8t, Tin PLATED
 3) TERMINAL SCREWS WITH WASHER: STEEL, Zinc PLATED, M4.0 **4**

4 Critical dimension: **4**
 APPROVAL:

YK 701 xx 0 x x 00G
 NO. OF POLES: 02: 2 POLES, 03: 3 POLES, 04: 4 POLES, ..., 18: 18 POLES
 MARK: 0: "@", 1: "ANY"
 G RoHS compliant (lead<4%) In copper Alloy
 TERMINAL & SCREW PLATED: 0: G/F, 1: G/F, 2: Sn, 3: Sn
4 1: TERMINAL & SCREW: G/F
4 2: TERMINAL: Sn, SCREW: G/F
4 3: TERMINAL: Sn, SCREW: Zinc

ANYTEK				CUSTOMER COPY			
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD							
TITLE		YK701 W/o flange and W/o cover SERIES					
PART NO.		YK701xx0xx00G		DWG NO.		8YK0002-701	
APPROVED		CHECKED		DESIGNED		DRAWN	
						Tolerance	
				Jacky 2012.12.11		X. ± 0.50	
				SHEET: 01/01		X.X ± 0.30	
				REV.: E		X.XX ± 0.10	
						X° $\pm 1^\circ$	