
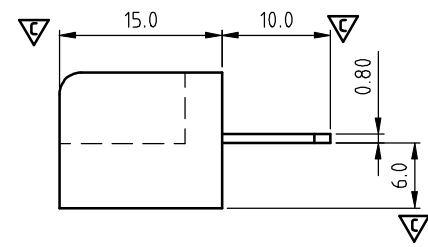
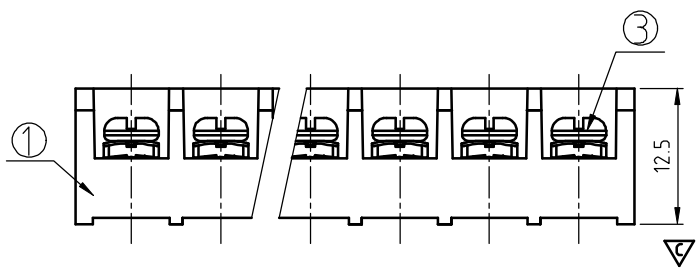


SIGN	DATE	DESCRIPTION	APPROVER
△	03/17/09	Change the plating specification	J.Selamus
△	06/04 '11	Critical dimension is changed.	Tason
△	06/04 '11	The Wire Range is changed from 20-12AWG to 22-12AWG	Tason
△	06/04 '11	The tolerance table is changed.	Tason
△	11/27'12	Change the screw plating specification	Jacky
△	12/07'13	Change the withstand voltage and current	Jacky

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

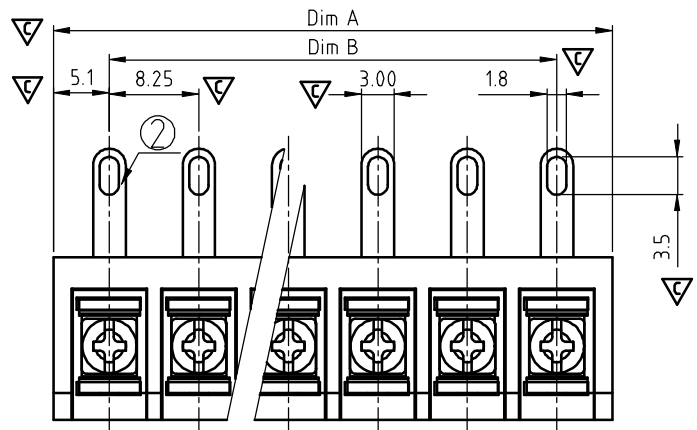

MATERIALS ELECTRICAL
 RATED VOLTAGE & CURRENT: cULus / CQC △
 WITHSTAND VOLTAGE: 300 V, 20 A/300 V, 32 A △
 INSULATION RESISTANCE: AC 2500 V/Min △
 OPERATING TEMPERATURE RANG: 1000 MΩ OR MORE AT DC 500 V
 SCREW TORQUE VALUE: -4.0 °C ~ +115 °C
 WIRE RANGE: 8.8 Lb-In
 22 - 12 AWG △
 1) MOLDED PARTS: POLYIMIDE 66, UL 94 V-0 BLACK
 2) TERMINAL: BRASS, 0.8t, Tin PLATED
 3) TERMINAL SCREWS: STEEL, M3

APPROVAL: △

YK 333 xx 0 x x 00G

NO. OF POLES
 02: 2 POLES
 03: 3 POLES
 04: 4 POLES
 ...
 30: 30 POLES

MARK
 0: "@ " MARK
 1: "ANY" MARK

TERMINAL & SCREW PLATED
 △ 0: TERMINAL & SCREW: G/F
 △ 1: TERMINAL: G/F, SCREW: Zinc
 △ 2: TERMINAL: Sn, SCREW: G/F
 △ 3: TERMINAL: Sn, SCREW: Zinc

△
 N = Number of poles
 Dim A = N x 8.25 + 2.0
 Dim B = (N - 1) x 8.25

Poles	Tol.	Dim A & B
2-5p	±0.20	
6-10p	±0.25	
11-16p	±0.35	
17-24p	±0.40	
25-30p	±0.50	

ANYTEK				CUSTOMER COPY			
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD							
TITLE	YK-333 Series			DWG NO.	8YK0001-333		
PART NO.	YK333xx0xx00G			CUST NO.			
APPROVED	CHECKED	DESIGNED	DRAWN			Tolerance	
		Jacky 2013.12.07	Jacky 2013.12.07			UNIT: mm	X. ±0.50
				SHEET: 01/01		SCALE: NONE	X.X ±0.30
						REV.: F	X.XX ±0.10
							X° ±1°