


SIGN	DATE	DESCRIPTION	APPROVER
△	11/10'10	Current is changed from 75A to 65A	Aaron
△	11/10'10	Wire range is changed from 10-4 AWG to 10-6 AWG	Aaron
△	11/10'10	Add is cULus Mark	Aaron
△	12/12'12	Change the screw plating specification	Jacky
△	12/12'12	Change the dimensional tolerance	Jacky

*THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!*

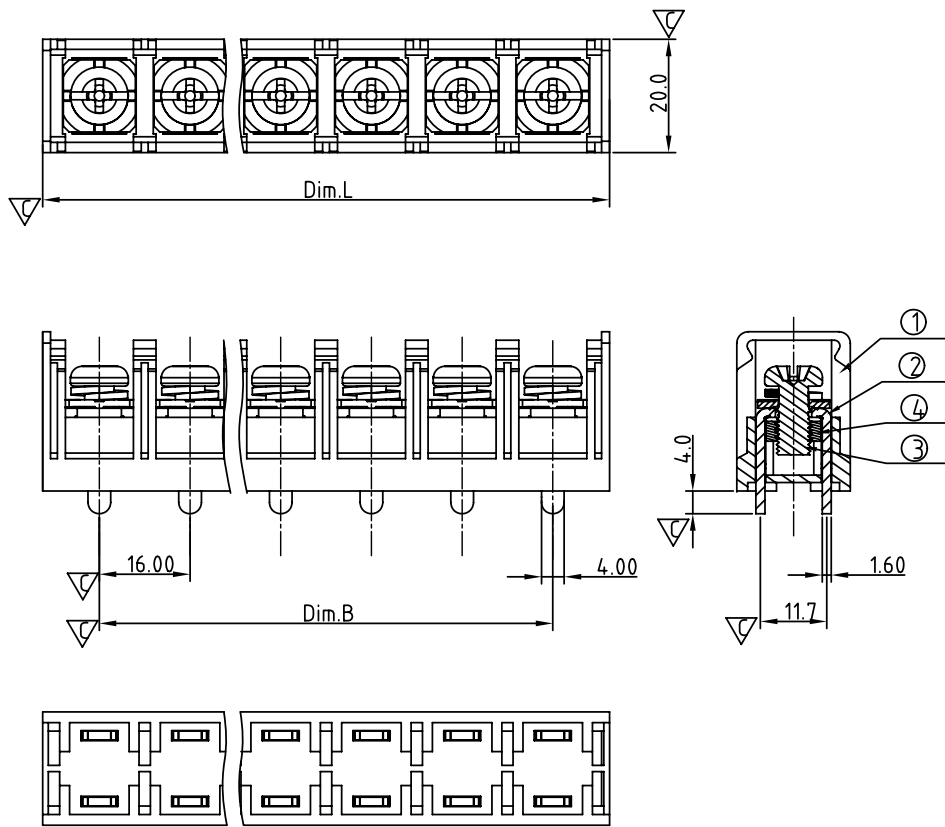

**MATERIALS ELECTRICAL**

**RATED VOLTAGE & CURRENT:** 600 V, 65A △

**WITHSTAND VOLTAGE:** AC 3000 V/Min

**INSULATION RESISTANCE:** 1000 MΩ OR MORE AT DC 500 V

**OPERATING TEMPERATURE RANG:** -40 °C ~ +115°C

**SCREW TORQUE VALUE:** 26 Lb-In.

**WIRE RANGE:** 10 - 6 AWG △

**1) BODY:** THERMOPLASTICS, UL94-V0 BLACK

**2) TERMINAL:** BRASS, 1.6t, Tin PLATED

**△3) TERMINAL SCREWS WITH WASHER:** STEEL, M6.0

**4) TERMINAL NUT:** STEEL Ni PLATED M6.0

APPROVAL: △

Critical dimension: ▽

PART NO.:

YK 901 xx 0 x x 00G

NO. OF POLES

02: 2 POLES

03: 3 POLES

04: 4 POLES

...

10: 10 POLES

RoHS compliant (lead<4%) In copper Alloy

MARK

0: "@" MARK

1: "ANY" MARK


TERMINAL & SCREW PLATED

0: TERMINAL & SCREW: G/F

△ 1: TERMINAL: G/F, SCREW: Zinc

2: TERMINAL: Sn, SCREW: G/F

△ 3: TERMINAL: Sn, SCREW: Zinc

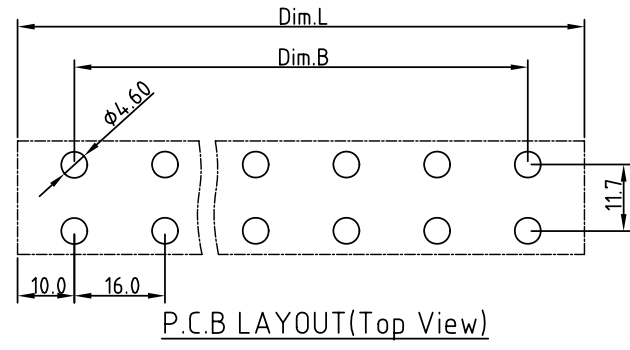

N= Number of poles

Dim.B= (N-1)x16.0

Dim.L= (N-1)x16.0+20.0 △

POLE	2P-6P	7P-10P
Dim.B	±0.40	±0.50
Dim.L	±0.40	±0.50

ANYTEK

### CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		YK901 W/o cover and W/o flange SERIES				
PART NO.		YK901xx0xx00G		DWG NO.		8YK0002-901
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance
		Jacky 2012.12.12	Jacky 2012.12.12			
						UNIT: mm
						SCALE: NONE
				SHEET: 01/01		X. ±0.50
				REV.: D		X.X ±0.30
						X.XX ±0.10
						X° ±1°