SIGN	DATE	DESCRIPTION	APPROVER
1	02/27'07	Part No. is changed.	Aaron
2	10/13'11	Operating temperature is changed	ChenMing
3	10/13'11	Remove the "VDE" mark	ChenMing
4	10/13'11	The dimension is changed from 22.90 to22.9	ChenMing
5			

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

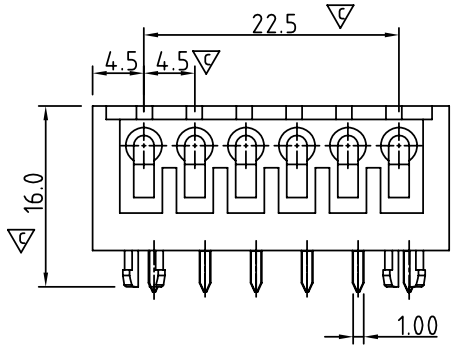

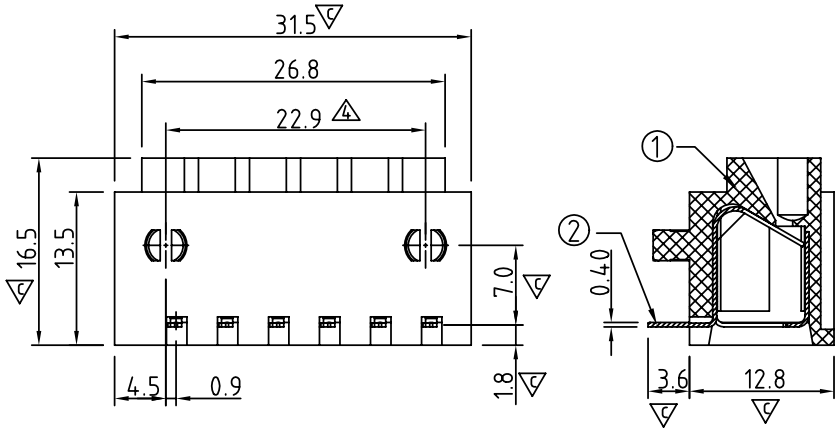

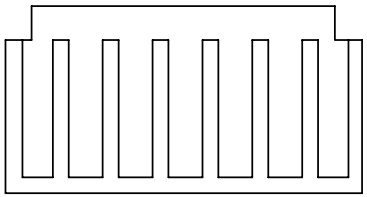

Material

- Item 1 Insulating body — Thermoplastic (UL94V-0)
- Item 2 Contacts PIN — PhBz(CuSn) Tin plated

Electrica

- Voltage rating: 300VAC
- Current rating: 2A
- Solid wire(AWG): 18
- Stranded wire(AWG): 18
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- (4) Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec
- (3) Safety Approval:
- Critical dimension: ▽

(1) TN 06 2 x 1 0 xxxx G

- 06 → RoHS compliant (lead<4%) In copper Alloy
- x: 0 Black; 9 White
- xxxx: 0000 Standard @ Logo; 000A Standard ANY Logo; Any special item by customer request, please contact sales department.

P.C.B LAYOUT

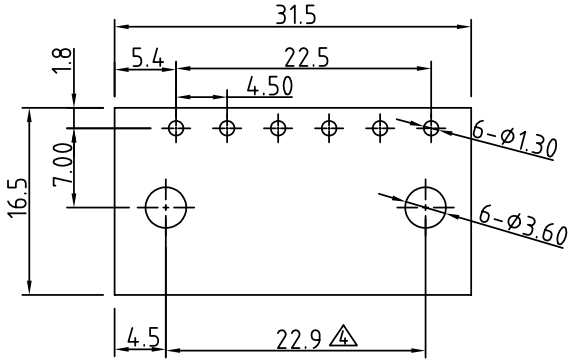

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	TN-4.5mm 180D Series 6P Without cover				
PART NO.	TN062X10XXXXG			DWG NO.	8TN0202
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
			ChenMing 2011.10.13	UNIT: mm	SCALE: NONE
				SHEET: 01/01	REV.: D

Tolerance	
X.	±0.50
X.X	±0.30
X.XX	±0.10
X°	±1°