

SIGN	DATE	DESCRIPTION	APPROVER
⚠	01/27/07	The Soldering temperature from 245° to 250°	Aaron
⚠	01/27/07	Add "VDE" stipulation	Aaron
⚠	8/6/07	The body bottom is changed.	Marvin
⚠	06/05/13	change the electrical specification	Da cheng





THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material

- Item 1 Insulating body :Thermoplastic (UL94V-0)
- Item 2 Insulating lever :Thermoplastic (UL94V-0)
- Item 3 Contact pin : Brass, Tin plated
- Item 4 Spring clamp : Stainless steel

⚠⚠ Electrical cULus TUV

- Voltage rating: 300V 500V
- Current rating: 8A 10A
- Wire range: 0.5-1.5mm²
- Solid wire(AWG): 16-20
- Stranded wire(AWG): 16-20
- Wire strip length: 8-9mm
- Withstanding Voltage: 1.6KV 1.89KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval:
- Critical dimension: ▽

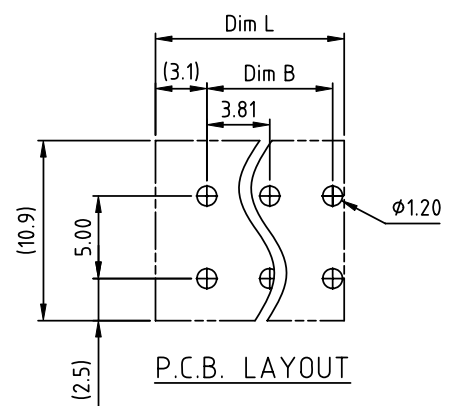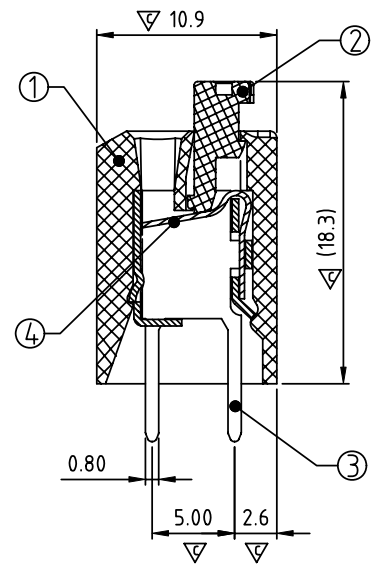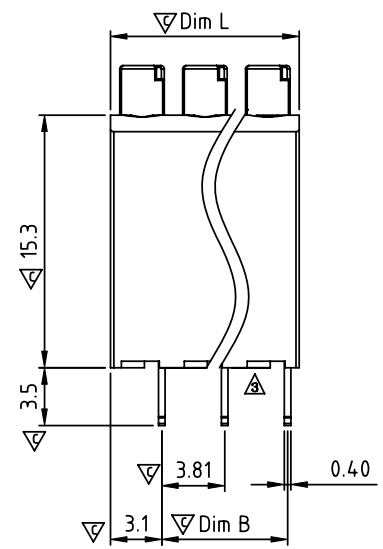

N = Number of poles
 Dim L=Nx3.81
 Dim B=(N-1)x3.81

	Dim L	Dim B
2-6p	±0.15	
7-12p	±0.20	
13-18p	±0.25	
19-24p	±0.30	

HV xx 30 x 0 xxxx G

RoHs compliant (lead<4%) In copper Alloy

Poles: 02 2Contacts, 03 3Contacts, 24 24Contacts

Color: 8 Grey (RAL 7004/P), 9 Orange

0000 Standard @ Logo, 000A Standard ANY Logo

Any special item by customer request, please contact sales department.

ANYTEK				CUSTOMER COPY			
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD							
TITLE	HV-3.81mm Series			DWG NO.	8HV0001		
PART NO.	HVxx30x0xxxxG			CUST NO.			
APPROVED	CHECKED	DESIGNED	DRAWN			Tolerance	
		Da cheng 2013.06.05	Da cheng 2013.06.05			X.	±0.50
				SHEET: 01/01		X.X	±0.30
				UNIT: mm		X.XX	±0.10
				SCALE: NONE		X°	±1°
				REV.: G			