


SIGN	DATE	DESCRIPTION	APPROVER
△	08/22'13	Add is cULus // update the drawing	Da cheng

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

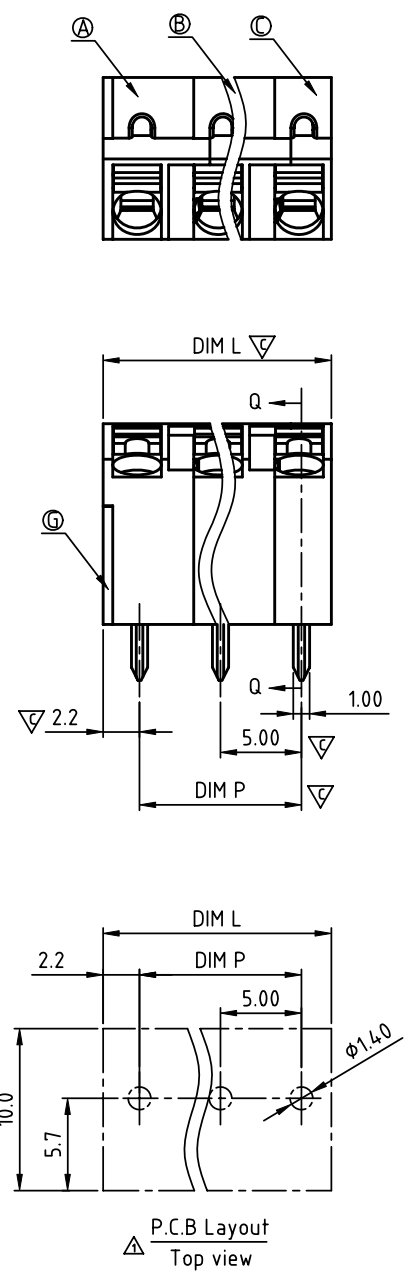

- Material:**
- Item A Terminal with cover of body: Thermoplastic (UL94V-0)
 - Item B Terminal normal body: Thermoplastic (UL94V-0)
 - Item C Terminal side body: Thermoplastic (UL94V-0)
 - Item D Terminal lever: Thermoplastic (UL94V-0) Orange(RAL2011/P)
 - Item E Female Contact : Brass. Tin Plated.
 - Item F Spring clamp : Stainless steel
 - Item G Terminal cover: Thermoplastic (UL94V-0)
- Electrical:** cULus
- Voltage rating: 300 V
 - Current rating: 10A
 - Wire range:
 - Solid wire(AWG): 16-26
 - Stranded wire(AWG): 16-26
 - Wire strip length: 8-9 mm
 - Withstanding Voltage: 1.6 KV
 - Operating temperature: -40°C to +115°C
 - Soldering temperature: 260°C ±5°C/5 Sec
- △ Safety Approval: cULus
- Critical dimension: ▽

NH xx 7 0 x 0 xxxx G

No. OF POLES
02: 2 POLES
24: 24 POLES

△ Body Color
0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange(RAL2011/P)
4 Yellow(RAL1018/A)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL7004/P)
9 White(RAL1102)
C Multiple colors

RoHS compliant (lead<4%)
In copper Alloy

0000: "@ " Logo (Standard)
000A: "ANYTEK" Mark
Any special item by customer request. please contact sales department.

N = Number of poles

$$\text{DimL} = (N-1) \times 5.0 + 4.1$$

$$\text{DimP} = (N-1) \times 5.0$$

POLES	DIM L	DIM P
2p-6p	±0.1	±0.1
7p-12p	±0.2	±0.2
13p-18p	±0.3	±0.3
19p-24p	±0.4	±0.4

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		NH 5.0mm Series	
PART NO.	NHxx70x0xxxxG	DWG NO.	8NH0002
APPROVED	CHECKED	DESIGNED	DRAWN
		Da cheng 2013.08.22	Da cheng 2013.08.22
CUST NO.		Tolerance	
		UNIT: mm	X. ±0.50
		SCALE: NONE	X.X ±0.30
		REV.: C	X.XX ±0.10
SHEET: 01/01		X° ±1°	