
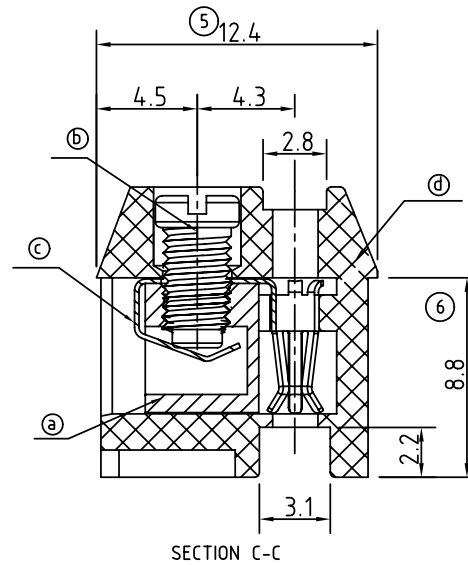
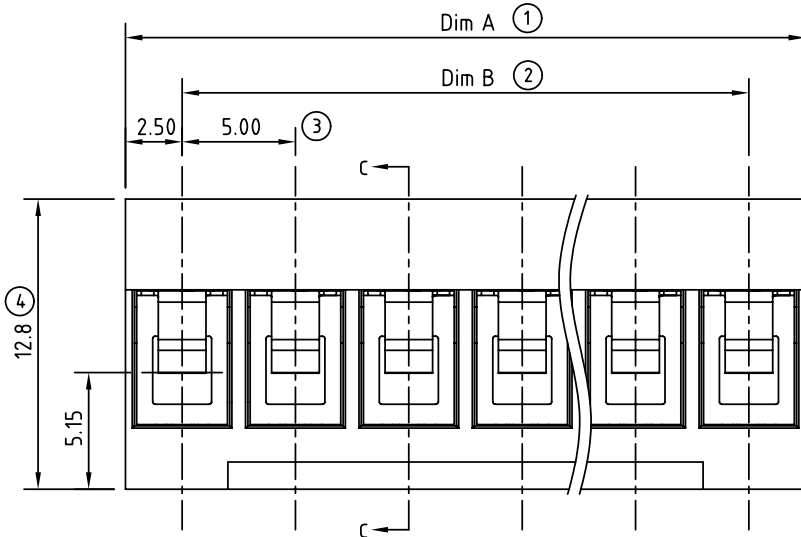


SIGN	DATE	DESCRIPTION	APPROVER
△	2009.12.25	modify specification	Jacke
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

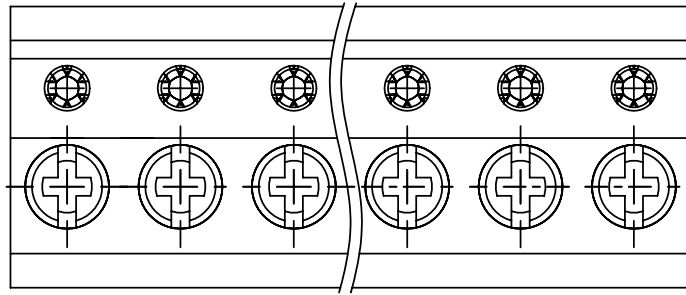

- Material**
- Item a Clamp: Zinc Alloy Ni plated
 - Item b Terminal screw: Steel Zinc plating "+/-" slot type
 - Item c Female contact: PhBz, tin plated
 - Item d Terminal housing: Thermoplastic (UL94V-0)

- Electrical**
- Voltage rating: 300V
 - Current rating: 10A
 - Wire range:
 - Solid wire(AWG): 12-26
 - Stranded wire(AWG): 12-26
 - Torque: 3.5Lb-In
 - Screw: M3.0
 - Wire strip length: 5-6mm
 - Withstanding Voltage: 1.6KV
 - Operating temperature: -40°C to +115°C

TX xx 02x0 xxxx G

- | | | | |
|-----|-------------|---|-------------------|
| 02 | 2 CONTACTS | 0 | Black (RAL9005) |
| 03 | 3 CONTACTS | 2 | Red (RAL3001/D) |
| ... | ... | 3 | Orange(RAL2011/P) |
| 12 | 12 CONTACTS | 4 | Yellow(RAL1018/A) |
| | | 5 | Green(RAL6018/T) |
| | | 6 | Blue (RAL5015/A) |
| | | 8 | Grey(RAL7035/D) |

RoHS
Pb<40,000ppm

0000 Standard @ Logo
000A Standard ANY Logo
Any special item by customer request, please contact sales department.

N = Number of poles
Dim A=Nx5.0
Dim B=(N-1)x5.0

	Dim A	Dim B
2-6p	±0.20	±0.20
7-12p	±0.30	±0.30

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		TX-5.0mm Series "+/-" Zinc Alloy			
PART NO.		TXxx02x0xxxxG		DWG NO. BTX0107	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Jacke 2009.12.25	Jacke 2009.12.25		
				UNIT: mm	
				SCALE: NONE	
				SHEET: 01/01	
				REV.: C	
				Tolerance	
				X. ±0.50	
				X.X ±0.30	
				X.XX ±0.10	
				X° ±1°	