
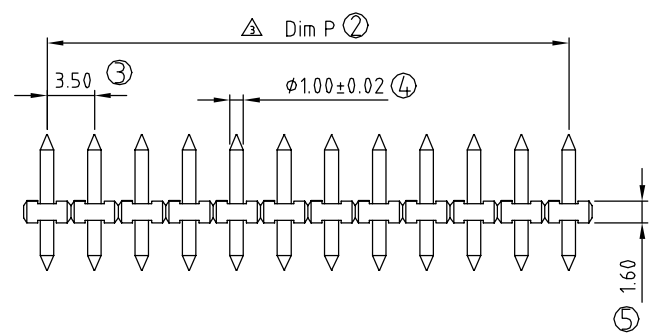


SIGN	DATE	DESCRIPTION	APPROVER
△	02/07'06	Part No. changed	Tony
△	1/31'07	Soldering temperature changed from 245° to 250°	Tony
△	04/18'11	Dimension is changed	Aaron

*THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!*

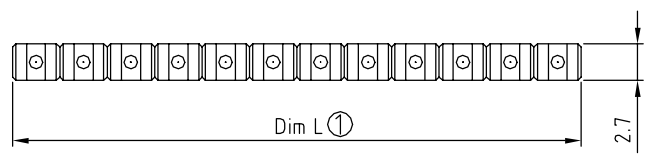

P.C.B. LAYOUT

- Material:
- Item ③ Terminal(housing): PA66(UL94V-0)
  - Item ④ Contact pin: Brass
- Electrical: cULus
- Voltage rating: 150V
  - Current rating: 10A
  - Withstanding Voltage: 1.3KV
  - Operating temperature: -40°C to +115°C
  - △ ● Soldering temperature: 250°C±10°C/5 Sec
  - Safety Approval:
  - △ ● Part No.:

**OP xx 2 B x 0 xxxx G**

POLES ————

02 pole  
 ... ..  
 24 pole

G: Pb<40000ppm

0000: Standard  
 Any special item by  
 customer request.  
 please contact sales  
 department.

0 Tin  
 1 Gold plating 10u"  
 2 Gold flash

Poles	02	03	04	05	06	07	08	09	10	11	12	13
Dim L	7.00	10.50	14.00	17.50	21.00	24.50	28.00	31.50	35.00	38.50	42.00	45.50
Dim P	3.50	7.00	10.50	14.00	17.50	21.00	24.50	28.00	31.50	35.00	38.50	42.00
TOL	±0.10				±0.15				±0.20			
Poles	14	15	16	17	18	19	20	21	22	23	24	
Dim L	49.00	52.50	56.00	59.50	63.00	66.50	70.00	73.50	77.00	80.50	84.00	
Dim P	45.50	49.00	52.50	56.00	59.50	63.00	66.50	70.00	73.50	77.00	80.50	
TOL	±0.25				±0.30							

<b>ANYTEK</b>				<b>CUSTOMER COPY</b>				
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD								
TITLE	OP 3.5 Series (配EH専用)						DWG NO.	80P0501
PART NO.	OPxx2Bx0xxxxG						CUST NO.	
APPROVED	CHECKED	DESIGNED	DRAWN			Tolerance		
		Aaron 2011.04.18	Tony 2007.01.31			X. ±0.50		
						X.X ±0.30		
						X.XX ±0.10		
						X° ±1°		
						UNIT: mm		
						SCALE: NONE		
						REV.: E		
						SHEET: 01/01		