

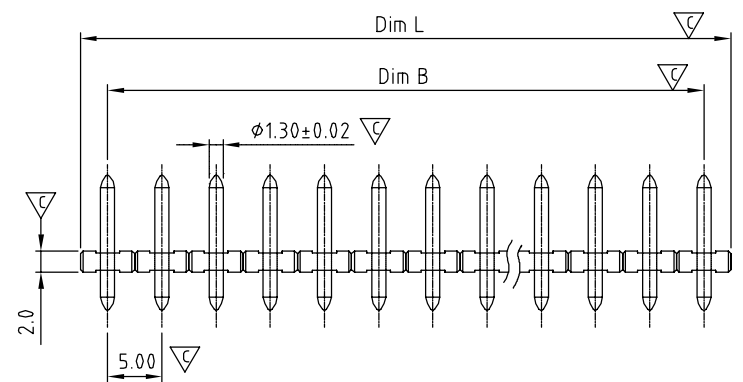


SIGN	DATE	DESCRIPTION	APPROVER
△			
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

- Material:
- Item ㉑ Terminal(housing): Thermoplastic (UL94V-0)
 - Item ㉒ Contact pin: Brass
- Electrical: UL / VDE / TUV
- Voltage rating: 300V / 300V / 300V
 - Current rating: 15A / 12A / 15A
 - Withstanding Voltage: 1.6KV / 2.5KV / 2.5KV
 - Operating temperature: -40°C to +115°C (-40°C to +130°C)
 - Soldering temperature: PA66,260°C±5°C/5 Sec (PA46,280°C/10Sec)
 - Safety Approval: VDE TÜV
 - Critical dimension:




OP xx 0 0 x x xxxx G

POLES ————

02 pole
" " "
24 pole

G RoHS compliant (lead<4%)
In copper Alloy
0000: Standard
Any special item by customer request, please contact sales department.
0 PA 66
1 PA46

0 Tin plated 200u"
1 Gold plating 10u"
2 Gold flash

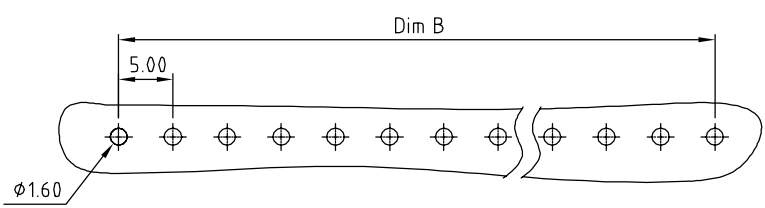

P.C.B. LAYOUT

N = Number of poles
Dim L = N x 5.0
Dim B = (N-1) x 5.0 ↔

	Dim L	Dim B
2-5p	±0.10	±0.10
6-9p	±0.15	±0.15
10-13p	±0.20	±0.20
14-17p	±0.25	±0.25
18-21p	±0.30	±0.30
22-24p	±0.40	±0.40

ANYTEK				CUSTOMER COPY															
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD																			
TITLE	OP 5.0 Series 12.5mm			DWG NO.	80P0085														
PART NO.	OPxx00xxxxxxG			CUST NO.															
APPROVED	CHECKED	DESIGNED	DRAWN	UNIT: mm SCALE: NONE SHEET: 01/01 REV.: B															
		Chen Bo 09/24`12	Chen Bo 09/24`12																
				<table border="1"> <tr> <td>Tolerance</td> <td>X.</td> <td>±0.50</td> </tr> <tr> <td></td> <td>X.X</td> <td>±0.30</td> </tr> <tr> <td></td> <td>X.XX</td> <td>±0.10</td> </tr> <tr> <td></td> <td>X°</td> <td>±1°</td> </tr> </table>				Tolerance	X.	±0.50		X.X	±0.30		X.XX	±0.10		X°	±1°
Tolerance	X.	±0.50																	
	X.X	±0.30																	
	X.XX	±0.10																	
	X°	±1°																	