

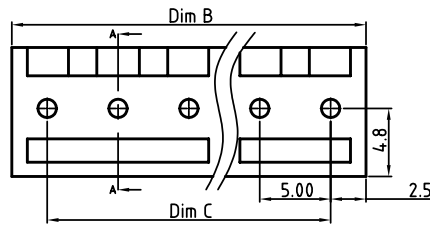
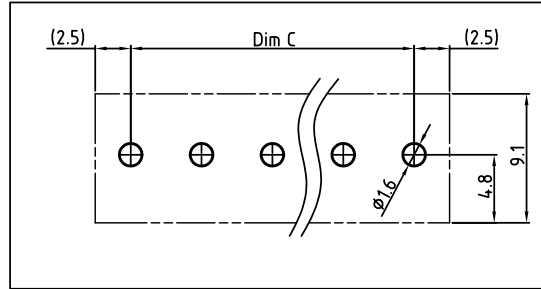


SIGN	DATE	DESCRIPTION	APPROVER
△	04/22`08	pin尖改為球面。	Tason
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

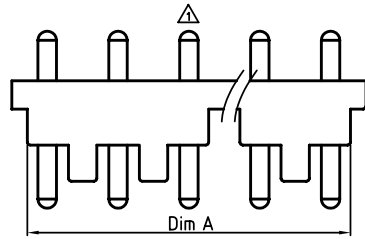

SECTION A-A

Material

- Item ① Terminal (Body): Thermoplastic (UL94V-0)
- Item ② Male contact pin: Brass, Tin plated

Electrical

- Voltage rating: 300VAC
- Current rating: 15A
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec

KG xx 00 x 0 xxxx G

- 02 2 CONTACTS 0 Black (RAL9005) 0000:standard Pb < 40,000ppm
- 03 3 CONTACTS 2 Red (RAL3001/D) Any special item by (RoHS)
- 3 Orange(RAL2011/P) customer request,
- 24 24 CONTACTS 4 Yellow(RAL1018/A) please contact sales
- 5 Green(RAL6018/T) department.
- 6 Blue (RAL5015/A)
- 8 Grey(RAL7035/D)

Poles	2	3	4	5	6	7	8	9	10	11	12	13
Dim A	7.80	12.80	17.80	22.80	27.80	32.80	37.80	42.80	47.80	52.80	57.80	62.80
Dim B	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00	55.00	60.00	65.00
Dim C	5.00	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00	55.00	60.00
TOL	±0.15						±0.20					
Poles	14	15	16	17	18	19	20	21	22	23	24	
Dim A	67.80	72.80	77.80	82.80	87.80	92.80	97.80	102.80	107.80	112.80	117.80	
Dim B	70.00	75.00	80.00	85.00	90.00	95.00	100.00	105.00	110.00	115.00	120.00	
Dim C	65.00	70.00	75.00	80.00	85.00	90.00	95.00	100.00	105.00	110.00	115.00	
TOL	±0.30						0.40					

ANYTEK				CUSTOMER COPY			
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD							
TITLE	KG 5.0						
PART NO.	KGxx00x0xxxxG			DWG NO.	8KG0001		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance		
		Tason	Tason		UNIT: mm	X.	±0.5
		09/17`07	09/17`07		SCALE: NONE	X.X	±0.3
					SHEET: 01/01	X.XX	±0.1
				REV.: C	X°	±1°	