


SECTION A-A

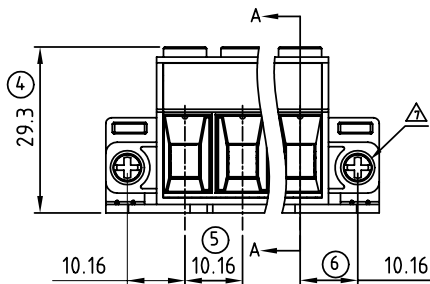

Poles	03	04
Dim L	30.32	40.48
Dim B	20.32	30.48
Dim C	48.24	58.4
TOL	±0.25	


SIGN	DATE	DESCRIPTION	APPROVER
△	04/08'09	The Voltage rating, Screw and operating temperature are changed	Jacke
△	04/08'09	The pole is changed	Jacke
△	2009.10.23	The design is changed	Jacke
△	2010.02.04	The material is changed from Brass to Copper	Jacke
△	2010.04.10	Add UL standard	Jacke
△	2010.06.07	The flange screw is changed from "-" type to "+/-" type	Cheng Bo

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!

Material

- Item a Terminal body :Thermoplastic (UL94V-0)
 - Item b Terminal cover :Thermoplastic (UL94V-0)
 - Item c Terminal screw :Steel Cr3+ Zinc plating "-" slot type
 - Item d Clamp:Brass, Ni plated
 - △ Item e Female contact pin :Copper Tin plated
 - Item f Wire guard :Stainless Steel
 - Item g With flange screw :Steel Zinc plating M3"+/-"slot type
 - Item h With steel holder :Steel Zinc plating
- Electrical cULus / IEC
- △ ● Voltage rating: 300VAC / 1000VAC
 - Current rating: 55A / 76A
 - Solid wire (AWG):6-20 / 0.5-16mm²
 - Stranded wire(AWG): 6-20 / 0.5-16mm²
 - Torque: 10.4 Lb-In / 1.2 N.m
 - △ ● Screw: M4.5
 - Wire strip length: 13-14mm
 - Withstanding Voltage: 1.6KV / 8KV
 - △ ● Operating temperature: -40°C to +115°C
 - △ ● Safety approval: cULus

EV xx 61 x 2 xxxx G

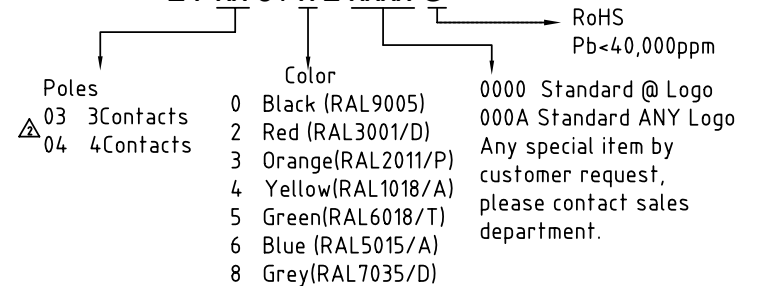

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE				EV 10.16 Series 3~4p (W/F) With handle		
PART NO.		EVxx61x2xxxxG		DWG NO.		8EV0003
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance
			Cheng Bo 2010.06.07			X. ±0.50
						UNIT: mm
SHEET: 01/01				REV.: G		X.XX ±0.10
						X° ±1°