


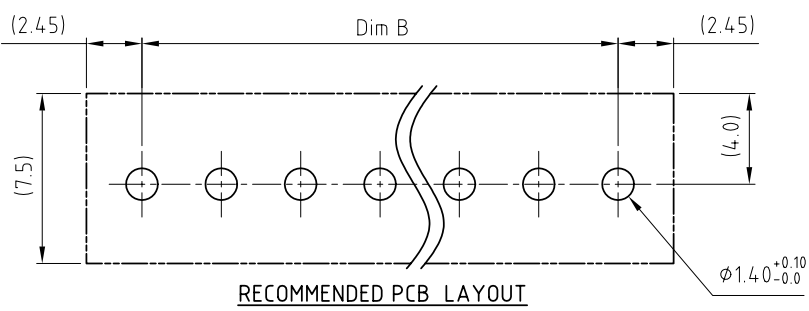
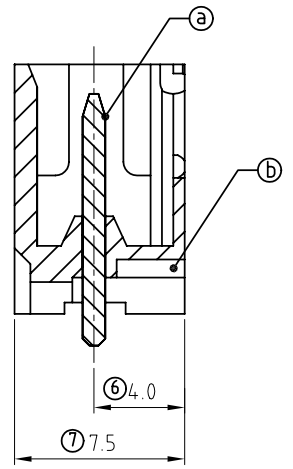
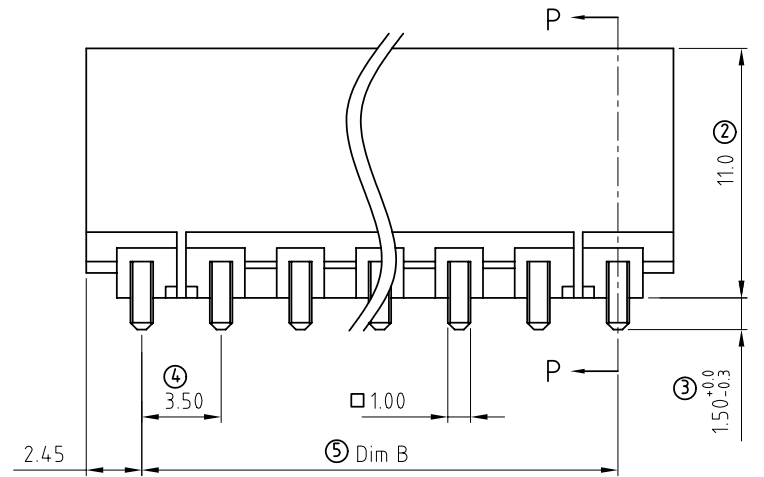
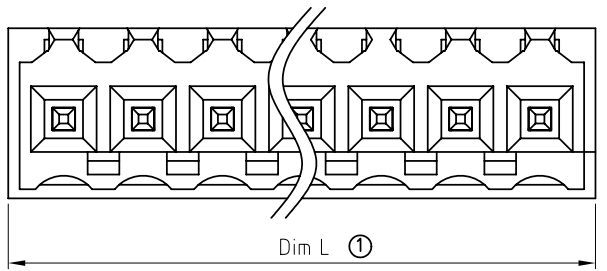
SIGN	DATE	DESCRIPTION	APPROVER
△	2010.10.23	Add UL standard	Jacke
△	2010.10.23	The material is changed from Brass to copper	Jacke
<i>THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!</i>			

**Material**

- Item ③ Male contact pin: Copper, Tin plated.
- Item ④ Terminal (housing): PA6T 30%GF(UL94V-0)

**Electrical cULus / IEC**


- Voltage rating: 300V/160V
- Current rating: 10A/13A
- Withstanding Voltage: 1.6KV/2.5KV
- Operating temperature: -40°C to +130°C
- Soldering temperature: 280°C/10 Sec
- △ ● Safety Approval: 



**EL xx 12 x 0 xxxx G**

- 02 2 POLES
  - 03 3 POLES
  - ... ..
  - 24 24 POLES
- Color  
0 Black (RAL9005)
- Pb < 40,000ppm (RoHS)
- 000 0 @ Logo  
000 A ANY Logo  
Any special item by customer request, please contact sales department.

Poles	2p	3p	4p	5p	6p	7p	8p	9p	10p	11p	12p	13p
Dim L	8.40	11.9	15.4	18.9	22.4	25.9	29.4	32.9	36.4	39.9	43.4	46.9
Dim B	3.50	7.00	10.5	14.0	17.5	21.0	24.5	28.0	31.5	35.0	38.5	42.0
TOL	±0.15					±0.20					±0.25	
Poles	14p	15p	16p	17p	18p	19p	20p	21p	22p	23p	24p	
Dim L	50.4	53.9	57.4	60.9	64.4	67.9	71.4	74.9	78.4	81.9	85.4	
Dim B	45.5	49.0	52.5	56.0	59.5	63.0	66.5	70.0	73.5	77.0	80.5	
TOL	±0.25					±0.30						

<b>ANYTEK</b>				<b>CUSTOMER COPY</b>			
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD							
TITLE		EL 3.5mm Vertical SMT TYPE Series					
PART NO.		ELxx12x0xxxx G			DWG NO.		8EL0001
APPROVED		CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance
			Jacke 2010.10.25	Jacke 2010.10.25			X. ±0.50
						UNIT: mm	
						SCALE: NONE	
				SHEET: 01/01		REV.: C	
						X.XX ±0.10	
						X° ±1°	