


DIMENSION

Dim A	Nx5.08+1.52
Dim B	(N-1)x5.08
Dim C	(N-1)x5.08
Dim D	Nx5.08+11.32
Dim E	(N-1)x5.08+10.8

N= NUMBER OF CONCATS

Poles	Tolerance
2P-6P	±0.20
7P-12P	±0.25
13P-18P	±0.30
19P-24P	±0.40

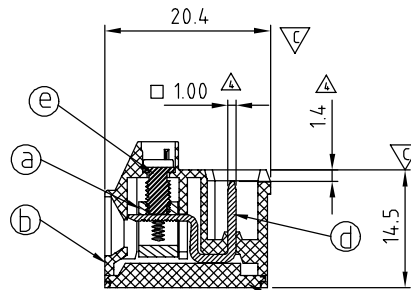

SECTION P-P

SIGN	DATE	DESCRIPTION	APPROVER
△	2010.10.11	The design is changed	Jacke
△	2011.08.17	Torque(Lb-In) is changed from 5.2(Lb-In) to 4.4(Lb-In)	Aaron
△	2011.08.17	Add is cULus	Aaron
△	2011.08.18	The dimension are added	Aaron

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:

- Item ① Clamp: Brass Ni plated
- Item ② Terminal(housing): Thermoplastic (UL94V-0)
- Item ③ Terminal(cover): Thermoplastic (UL94V-0)
- Item ④ Contact pin : Brass,Tin plated.
- Item ⑤ Terminal screw: Steel Zinc plating solt "-"type M3

Electrical: cULus

- Voltage rating: 300V
- Current rating: 12A
- Wire range:
- Solid wire(AWG): 12-30
- Stranded wire(AWG): 12-30
- △ ● Torque(Lb-In): 4.4
- Screw: M3
- Wire strip length: 6 -7 mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- △ ● Safety Approval: **ULus**
- Critical dimension: ▽

V5 xx 51 x 0 xxxx G

No. OF POLES		G: Pb<40000ppm
02 2 CONTACTS		0000: "@" Logo (Standard)
03 3 CONTACTS		000A: "ANYTEK" Mark
...		Any special item by customer request.
24 24 CONTACTS		please contact sales
	Color	
	0 Black (RAL9005)	
	5 Green(RAL6018/T)	
	6 Blue (RAL5015/A)	
	8 Grey(RAL7035/D)	
	C Green(RAL6018/U)	

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		V5 - 5.08 Series 2P-24P (W/O Flange) Bottom cover fixed type				
PART NO.		V5xx51x0xxxxG		DWG NO.		8V50006
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance
		Aaron 2011.08.18	Jacke 2010.10.11			X. ±0.50
						X.X ±0.30
						UNIT: mm
				SHEET: 01/01		X° ±1°
				REV.: D		