



SIGN	DATE	DESCRIPTION	APPROVER
△	2010.03.31	Add the 2p mark	Jacke
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			


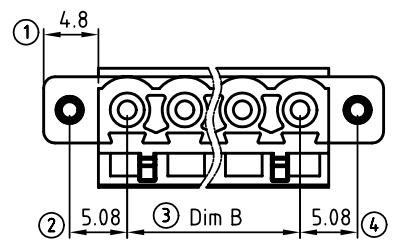


Material:

- Item a :Terminal housing:Thermoplastic (UL94 V-0)
- Item b :With flange screw: Steel Zinc plated, M2.5"/+/-"

Electrical (Match with A0 series)

- Voltage rating: 300V
- Current rating: 10A
- Wire range: 0.5-1.0mm²/1.5-2.5mm²
- Withstanding Voltage: 1.6KV

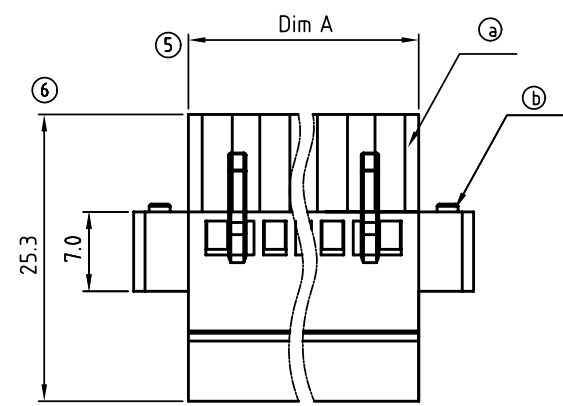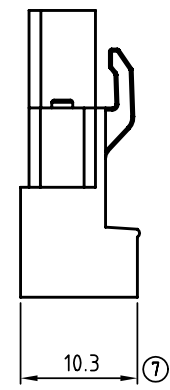

KI xx 50 x 3 xxxx G

No. OF POLES	Color	G: Pb<40000ppm
02 2 CONTACTS	0 Black (RAL9005)	0000: "@ " Logo (Standard)
03 3 CONTACTS	2 Red (RAL3001/D)	000A: "ANYTEK" Mark
... ..	3 Orange(RAL2011/P)	Any special item by customer request.
24 24 CONTACTS	4 Yellow(RAL1018/A)	please contact sales department.
	5 Green(RAL6018/T)	
	6 Blue (RAL5015/A)	
	8 Grey(RAL7035/D)	

N = Number of poles
 Dim A=Nx5.08
 Dim B=(N-1)x5.08

Dim. Poles	Dim A	Dim B
2-6p	±0.20	±0.20
7-12p	±0.25	±0.25
13-16p	±0.30	±0.30
17-24p	±0.40	±0.35

ANYTEK				CUSTOMER COPY			
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD							
TITLE		KI 5.08 SERIES (加高有耳)					
PART NO.		KIxx50x3xxxxG		DWG NO.		8KI0104	
APPROVED		CHECKED		DESIGNED		DRAWN	
		Jacke		Jacke			
		2010.03.31		2010.03.31			
						Tolerance X. ±0.50 X.X ±0.30 X.XX ±0.10 X° ±1°	
						UNIT: mm SCALE: 2/1	
				SHEET: 01/01		REV.: C	