


SECTION Q-Q

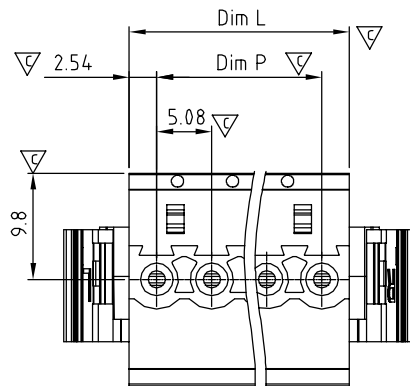

N=NUMBER OF POLES

Dim L	Nx5.08
Dim P	(N-1)x5.08

	TOL			
	2P-6P	7P-12P	13P-18P	19P-24P
Dim L	±0.15	±0.25	±0.35	±0.40
Dim P	±0.15	±0.25	±0.35	±0.40

SIGN	DATE	DESCRIPTION	APPROVER
△		THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!	

Material

- Item Ⓐ Terminal up housing: Thermoplastic (UL94V-0)
- Item Ⓑ Terminal down housing: Thermoplastic (UL94V-0)
- Item Ⓒ Terminal screw: Steel, Zinc plating "-" slot type
- Item Ⓓ Clamp: Brass, Ni plated
- Item Ⓔ Male contact pin: PhBz, Tin plated
- Item Ⓕ With latch: Thermoplastic (UL94V-0)

Electrical

- Voltage rating: 300V
- Current rating: 12A
- Solid wire (AWG): 12-24
- Stranded wire (AWG): 12-24
- Torque (Lb-In): 4.3
- Screw: M3
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Critical dimension: ▽

K5 xx 51 x 2 xxxx G

No. OF POLES		G: Pb<40000ppm
02 2 CONTACTS	Color	0000: "@" Logo (Standard)
03 3 CONTACTS	0 Black (RAL9005)	000A: "ANYTEK" Mark
...	2 Red (RAL3001/D)	Any special item by customer request.
24 24 CONTACTS	3 Orange (RAL2011/P)	please contact sales department.
	4 Yellow (RAL1018/A)	
	5 Green (RAL6018/T)	
	6 Blue (RAL5015/A)	
	8 Grey (RAL7035/D)	
	C Green (RAL 6018/U)	

**ANYTEK**

**CUSTOMER COPY**

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	K5 - 5.08 Series 2P-24P "-" screw (With latch)				DWG NO.	8K50003	
PART NO.	K5xx51x2xxxxG			CUST NO.			
APPROVED	CHECKED	DESIGNED	DRAWN			Tolerance	
		Aaron 2011.09.22	Aaron 2011.09.22			UNIT: mm	X. ±0.50
				SHEET: 01/01		SCALE: NONE	X.X ±0.30
						REV.: B	X.XX ±0.10
							X° ±1°