


SECTION A-A

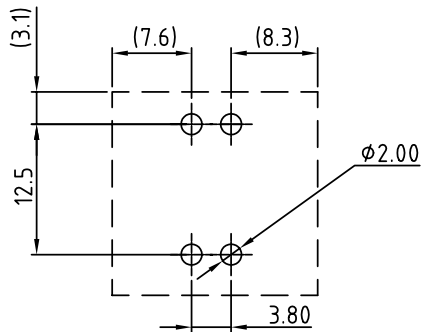

P.C.B Layout

SIGN	DATE	DESCRIPTION	APPROVER
△	02/02'07	Soldering temperature changed from 245° to 250°	Tason
△	02/02'07	Part NO is Changed	Tason
△	07/04'09	Current,torque,operating temperature are changed	JODY
△	11/11'09	Wire guard solder pin is changed from Brass to Copper	Aaron

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:

- Item 1 Terminal housing :Thermoplastic (UL 94V-0)
- Item 2 Clamp : Brass ,Ni plated
- △ ● Item 3 Wire guard solder pin : Copper ,Tin plated
- Item 4 Terminal screw: Steel Zinc plating"-slot type

Electrical

- Voltage rating : 600V
- △ ● Current rating : 100A
- Wire range :
- Solid wire (AWG) : 3-18
- Stranded wire (AWG) : 3-18
- △ ● Torque (LB-In.) : 30
- Screw : M5
- Wire strip length : 12-15mm
- Withstanding Moltage : 2.2KV
- △ △ ● Operating temperature : -40°C+115°C
- Soldering temperature : 250°C+10°C/5 Sec
- Safety Approval: US

△ EJ 01 D 1 x 1 xxxx G

- | | | |
|-------------------------|---------------------------------------|--------------|
| 0 Black | 0000:"@Logo (Standard) | RoHS |
| 5 Green
(RAL 6018/T) | 000A:"ANYTEK"Logo | Pb<40,000ppm |
| 6 Blue | Any special item by customer request, | |
| 8 Grey
(RAL 7035/D) | please contact sales department. | |

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		EJ 1 Pole Series				
PART NO.		EJ01D1X1xxxxG		DWG NO.		8EJ0001
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		
		Aaron 2009.11.11	Aaron 2009.11.11			
				SHEET: 01/01		UNIT: mm SCALE: NONE REV.: E
						X. ±0.50 X.X ±0.30 X.XX ±0.10 X° ±1°