



SIGN	DATE	DESCRIPTION	APPROVER
△	2010.01.25	Add cULus standard	Jacke
△	2010.01.25	The design is changed	Jacke
△	2010.03.31	Add the 2p mark	Jacke

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!


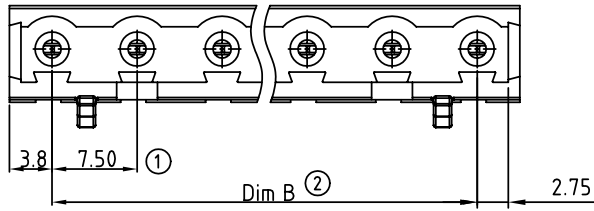


Materials

- Item a Terminal body:Thermoplastic (UL94V-0)
- Item b Terminal Cover:Thermoplastic (UL94V-0)
- Item c Female contact:PhBz(CuSn),Tin plated

Electrical


- Voltage rating: 300VAC
- Current rating: 10A
- Withstanding Voltage: 1.6kv
- Operating temperature: -40°C to +115°C
- Soldering temperature: 245°C±10°C/5 Sec
- △ ● Safety Approval:

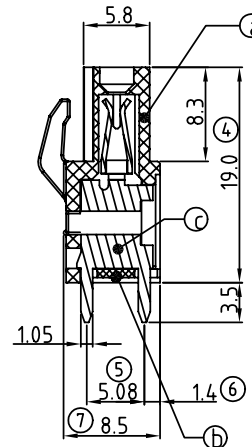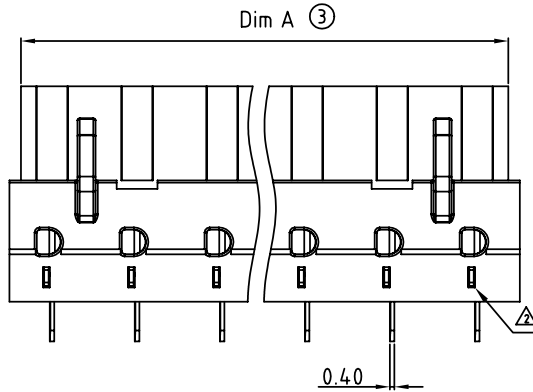

V7 xx A 1 x 0 xxxx G

- No. OF POLES
- 02 2 CONTACTS
 - 03 3 CONTACTS
 -
 - 16 16 CONTACTS

- Color
- 0 Black (RAL9005)
 - 2 Red (RAL3001/D)
 - 3 Orange(RAL2011/P)
 - 4 Yellow(RAL1018/A)
 - 5 Green(RAL6018/T)
 - 6 Blue (RAL5015/A)
 - 8 Grey(RAL7035/D)
- G: Pb<40000ppm
- 0000: "@" Logo (Standard)
- 000A: "ANYTEK" Mark
- Any special item by customer request. please contact sales department.

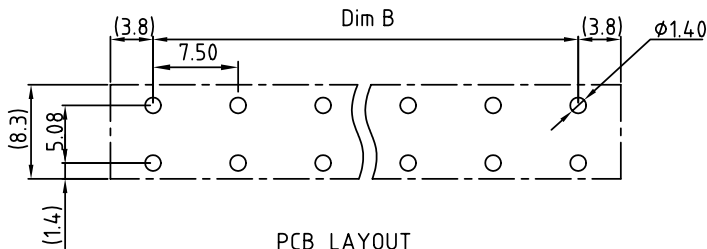

PCB LAYOUT

ANYTEK

INSPECTION COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE				V7 7.5 Series Vertical (2P~16P)			
PART NO.		V7xxA1x0xxxxG		DWG NO.		8V704.01	
APPROVED		CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance
		Jacke	Jacke				X. ±0.5
		2010.03.31	2010.01.26				X.X ±0.3
					UNIT: mm		X.XX ±0.1
					SCALE: 1/4		X° ±1°
				SHEET: 01/01	REV.: D		

Poles	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	
Dim A	13.0	20.5	28.0	35.5	43.0	50.5	58.0	65.5	73.0	80.5	88.0	95.5	103.0	110.5	118.0	
Dim B	7.5	15.0	22.5	30.0	37.5	45.0	52.5	60.0	67.5	75.0	82.5	90.0	97.5	105.0	112.5	
TOL	±0.15				±0.25				±0.35							